


*Products for*  
**LIFE SCIENCES FACILITIES**



Low-Cost Solutions for High Technology

# BIOSAFE® CLEANROOM CONVERSION SYSTEM

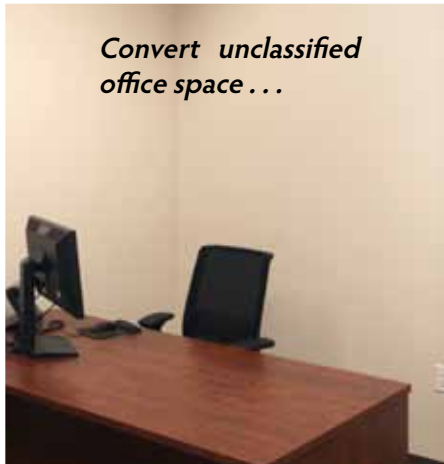

*Convert unclassified office space . . .*



**FM**  
APPROVED  
Class A FRP and C-PVC panels are Factory Mutual (FM) approved.

*. . . into an ISO 5 – 8 cleanroom!*

The Biosafe® Cleanroom Conversion System is an ideal solution for universities, government laboratories and other facilities looking to convert a standard office or other unclassified space into an ISO 5 – 8 cleanroom. Models are custom quoted according to your specification.

## Unique Three-Part System Includes:

- Modular ceiling grid
- BioSafe Cleanroom Wall System (FRP or C-PVC panels)
- Various flooring and other options to meet your cleanliness requirements

**Ceiling Grids:** Rigid, all-steel interlocking and self-supporting meets ISO 5 – 8 requirements. Mounts directly to existing wall or rest on top of walls with no ceiling. Extends up to 20 feet without the need for internal support columns or ceiling suspension wires.

**Cleanroom Wall System:** Made of FRP or C-PVC. Mounts to any wall type (also accommodates USP-797 Compounding Cleanrooms) See details on page 2.

**Room-Side Replaceable Fan/Filter Unit:** Available with HEPA and ULPA filters.

**Cleanroom Lighting:** Available in LED strips or fluorescent ceiling modules.

**Pass-Throughs and Air Showers:** Reduces cross contamination.

**Cleanroom Doors:** Available in Aluminum Frame Swing Door, Aluminum Frame Sliding Door and Stainless Steel Swing Doors.

**Service Outlets:** For installation of electrical and vacuum/gas utility outlets.

**Terra** provides complete pre-sale and after-sale support. Call Terra for complete quotations including drawings (if applicable) and manufacturing time.

## Installation:

Terra can also install your BioSafe Cleanroom Conversion System and perform a seismic analysis, or provide installation support for local contractors.

[View](#) online product page.



*Easy to clean and sterilize contamination-free processing environment for bio-pharmaceutical and other operations.*



*Economical design maintains ISO 5 – 8 conditions.*

## BIOSAFE FRP/C-PVC MODULAR CLEANROOMS

Features HEPA or ULPA fan/filter units; status indicator lights, ceiling panels in choice of polypropylene, acrylic or fire-safe steel, fluorescent or LED lights, display panel, choice of swing door or infrared-activated fast-response sliding doors, choice of internal wall panels (FM-approved FRP or C-PVC: see page 2 for details), all-steel ceiling grid with welded or interlocking BioSafe design. Free-standing structure requires no external bracing or ceiling suspension. [View](#) online product page.

## HYBRID CLEANROOM

This cleanroom combines several design features of Terra's other models. Like standard hardwall cleanrooms, it features ceiling HEPA fan/filter units that meet ISO 5-8 cleanliness standards and maintains internal positive pressure that prevent particle influx. Its anti-static vinyl panels form a smooth interior, like those of a BioSafe Cleanroom, that can be wiped clean and sterilized, making it suitable for bio/pharmaceutical applications. And, like Terra's softwall rooms, it provides cleanroom performance at low cost. Call to discuss your application. [View](#) online product page.

Compounding ISO 5 Laminar Flow Hood (Primary Engineering Control) #1695-41



Compounding Aseptic Isolator #2900-46C



**Modular Compounding Cleanrooms**

- Turnkey systems designed for USP-797 compliance
- FM-approved FRP or C-PVC panels
- Includes ISO 8 anteroom, ISO 7 buffer room
- Shown: Custom Size (10' x 10' buffer room)

Terra's USP-797 Compounding Cleanrooms exceed the ISO 7 requirements of USP-797, making them ideal for compounding sterile injectables and other critical operations. Select between standard floor plans, or specify a custom dimension. All models feature entry doors and internal partitions that separate the antechamber for personnel gowning or product staging. Models are available with FRP or C-PVC panel options. [View](#) online product page.

- Includes three HEPA filter/fan units that provide a total of 1950 CFM (3315 m<sup>3</sup>/hr.) of 99.99% particle-free air (measured at 0.3 μm diameter)
- Powder-coated steel support frame creates a sturdy and rigid structure that needs no external bracing or ceiling support
- BioSafe® interior Fiberglass-Reinforced Plastic (FRP) or C-PVC panels resist damage from physical contact and stand up to IPA and other sterilizing agents
- **Class C FRP** panels meet ISO 7 (Class 10,000) standards
- **Class A FRP** panels perform to ISO 5 (Class 100) cleanliness requirements, and are Factory Mutual (FM) approved
- **C-PVC** panels meet ISO 5 requirements and are FM approved
- Turnkey system controls submicron particles for a contamination-free compounding environment
- Separate gowning ante-room meets USP-797 regulations
- Standard dimensions easily accommodate glove boxes or ISO 5 hood (Primary Engineering Control)

USP-797 Compounding Cleanrooms do not include floors; they are designed for installation on a flat, sealed, non-particulating, crevice-free surface, which can be caulked to the clean room frame to form a seal.

Dual Magnehelic® pressure gauges, located on the outer control panel, monitor the cascading pressure levels in the anteroom and main room, simplifying USP-797 certification.



Stainless Steel Window



Stainless Steel Door



Fan Filter Status Light

USP-797 Compounding Cleanrooms*		7-ft Ceiling Height		8-ft Ceiling Height	
Panel Type	Dimensions L x W nominal ft.	Cat. #	S/Each	Cat. #	S/Each
BioSafe Class C FRP Panels	8 x 6	2900-52C	13,300	2900-71	13,650
BioSafe Class C FRP Panels	10 x 6	2900-53C	14,200	2900-72	14,600
BioSafe Class A FRP Panels* Certified ISO 5 compatible	8 x 6	2900-54C	13,950	2900-73	14,300
BioSafe Class A FRP Panels* Certified ISO 5 compatible	10 x 6	2900-55C	15,000	2900-74	15,400
BioSafe C-PVC Panels Certified ISO 5 compatible	8 x 6	2900-81	14,420	2900-83	15,640
BioSafe C-PVC Panels Certified ISO 5 compatible	10 x 6	2900-82	14,770	2900-84	16,040

\* Includes (3) filter/fan units, (1) fluorescent light, (2) Magnehelic® gauges, air speed gauge, internal swing door, 115V/60Hz duplex outlet, and external swing door



Class A FRP and C-PVC panels are Factory Mutual (FM) approved.

Contact Terra at 714-578-6100 about USP 800-compliant custom cleanrooms for processing of hazardous drugs.

# CLEANSEAM+™ 304 STAINLESS STEEL PASS-THROUGH CHAMBERS



Unique design hugs the wall to eliminate dusty surfaces!

The CleanSeam+ Pass-Through provides the optimal transfer chamber for the broadest range of critical applications, including cleanliness requirements to ISO 4 and bio/pharmaceutical operations that require frequent cleaning and sterilization.

- Mounts to any wall thicker than 2" without special hardware—installs in under three minutes!
- Integral clean-side bracket seals flush to wall without fasteners or caulking
- Unique folded design features 12 rounded corners with no cracks; ideal for strict cleaning protocol
- Electropolished 304/316 chamber and hardware eliminate surface contaminants and irregularities
- Interlock prevents cross-contamination—rated for millions of operations
- Stainless steel-reinforced, double-wall static-dissipative PVC viewing windows



## Why is Electropolishing Critical?

- Removes iron and other surface impurities that cause corrosion
- Draws chromium and nickel to form a hard, protective finish
- Removes irregularities (pits and burrs) for an ultra-smooth surface that's easy to clean

[View](#) online product page. for more on Terra's electropolishing procedures.

## Resources for Architects and Builders



[View](#) online product page. including access to 3-part specs and BIM objects.

### CleanSeam 304 Stainless Steel Pass-Throughs\*

Mount Type	Dimensions* W" x D" x H"	Electropolished 304 SS**		Electropolished 316 SS**	
		Cat. #	\$/Each	Cat. #	\$/Each
Wall	12 x 12 x 12	2636-01E-2	3,691.00	2636-01-E-2-316	4,303.00
	12 x 12 x 24	2636-02E-2	5,075.00	2636-02-E-2-316	5,895.00
	18 x 18 x 16	2636-03E-2	5,445.00	2636-03-E-2-316	6,380.00
	18 x 18 x 24	2636-04E-2	6,043.00	2636-04-E-2-316	7,099.00
	24 x 24 x 16	2636-05E-2	6,662.00	2636-05-E-2-316	7,827.00
	24 x 24 x 24	2636-06E-2	7,141.00	2636-06-E-2-316	8,401.00
	24 x 36 x 24	2636-07E-2	8,095.00	2636-07-E-2-316	9,516.00
	36 x 36 x 24	2636-08E-2	10,524.00	2636-08-E-2-316	12,432.00
	24 x 24 x 36	2636-09E-2	8,443.00	2636-09-E-2-316	9,965.00
	24 x 24 x 48	2636-16E-2	9,542.00	2636-16-E-2-316	10,973.00
	36 x 36 x 36	2636-10E-2	11,411.00	2636-10-E-2-316	13,101.00
36 x 36 x 48	2636-11E-2	12,279.00	2636-11-E-2-316	14,530.00	
Floor	24 x 24 x 36	2636-12E-2	9,904.00	2636-12-E-2-316	11,405.00
	36 x 36 x 36	2636-13E-2	11,996.00	2636-13-E-2-316	15,241.00
	36 x 36 x 48	2636-14E-2	13,734.00	2636-14-E-2-316	16,276.00

\*Add .5" to W x H for cut-out \*\* Windows are dissipative PVC

# PASS-THROUGH TRANSACTION WINDOWS and DRAWERS



These service windows provide safety and efficiency. Models are ideal for use in reception areas or between adjoining labs or offices.

- Frames are made of stainless steel for durability
- Secure windows are made of 1/2" tempered glass
- [View](#) online product page.

**A. Transaction Drawer:** Allows transfer of paperwork, and small packages

**B. Transaction Window:** (shown) Includes 7" deep writing shelf

**C. Transaction Tray:** (not shown) Slim opening below the 1/2" tempered glass window; shelves on each side can be used as a writing surface

Model	Nominal Max. Outside Dims W" x D" x H"	Standard Model		Bullet-Proof Models 1" Acrylic Window	
		Cat. #	\$/Each	Cat. #	\$/Each
Transaction Drawer	17 x 10.75 x 19	5050-60	1,334.00	5050-60	1,334.00
Transaction Window	21.75 W x 23 H	5050-62	380.00	5050-63	580.00
Transaction Tray	18.25 x 7 x 21.5	5050-61	1,015.00	5050-64	1,215.00



### Pass-Through Convenience Window with Swing Door

Window Dims W" x H"	Glass Swing Door*		Polypropylene Swing Door	
	Cat. #	\$/Each	Cat. #	\$/Each
Wall-Mount				
12 x 12	1702-70	1,386.00	1702-91	1,386.00
18 x 24	1702-71	1,984.00	1702-92	1,984.00
24 x 24	1702-72	2,446.00	1702-93	2,446.00
24 x 36	1702-73	3,184.00	1702-94	3,184.00
Floor Mount				
36 x 36	1702-74	4,026.00	1702-95	4,026.00
36 x 48	1702-75	4,707.00	1702-96	4,707.00

\* Swing door comes with stainless steel frame and shelf

# PUREDRY™ CLEANROOM HAND AND GLOVE DRYER

- Microfilters capture sub-micron particles to reduce contamination and germs that can spread infection
- Also ideal for drying tools, bottles, microelectronic components and other small particle-sensitive materials

- ULPA (Ultra Low Penetration Air) filter—ISO 5 compatible
- Insulation and motor isolation reduce noise
- Brushless motor eliminates carbon contaminants for ultra-clean operation



## Germ-Free Recirculating Model (No. 3333-33)

Eliminates filter clogs and germ accumulation.

PureDry Hand/Glove Dryer Recirculating Model		
Description	Cat. #	S/Each
120VAC/60Hz	<b>3333-33</b>	<b>2,638.00</b>
220VAC/50Hz	<b>3333-33-220</b>	<b>2,638.00</b>
Replacement ULPA Filter 99.999% efficient@ 0.12 micron	<b>3333-35</b>	<b>200.00</b>



## Single-Pass Model (No. 3333-00)

Space-saving, wall-mount unit features an easy-access ULPA filter.

PureDry Hand/Glove Single Pass Model		
Description	Cat. #	S/Each
120VAC/60Hz	<b>3333-00</b>	<b>1,906.00</b>
220VAC/50Hz	<b>3333-00-220</b>	<b>1,906.00</b>
Replacement ULPA Filter 99.999% efficient@ 0.12 micron	<b>3333-39</b>	<b>180.00</b>

## HAND AND GLOVE WASHING AND DRYING STATIONS

Terra specifically designed these integrated washing/drying stations for use in critical cleanroom and gowning room environments.

- Incorporates washing and ULPA-filtered drying modules in one cleanroom-compatible station
- Infrared (IR) beam activation for hands-free, non-contaminating operation
- Optional liquid soap dispenser
- Incorporates noise-absorbing insulation and isolated motor for quiet operation
- Drying module incorporates blower, energy-efficient heater with insulated air flow tubing, and an ULPA (ultra-low penetration air) filter rated 99.999% efficient @ 0.12µm particles

*Brushless motor eliminates carbon contaminants for ultra-clean operation*



[View](#) online product page.

### Hand/Glove Cleaning Station

Dimensions Includes levelers W" x D" x H" Nominal	No. of Sinks	304 Stainless Steel				Electropolished 304 Stainless Steel			
		110VAC/60Hz		220VAC/50Hz		110VAC/60Hz		220VAC/50Hz	
		Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each
24 x 22 x 61	1	<b>9600-60</b>	<b>5,417.00</b>	<b>9600-60-220</b>	<b>5,525.00</b>	<b>9600-05</b>	<b>6,877.00</b>	<b>9600-05-220</b>	<b>6,272.00</b>
48 x 22 x 61	2	<b>9600-61</b>	<b>10,662.00</b>	<b>9600-61-220</b>	<b>10,770.00</b>	<b>9600-06</b>	<b>12,230.00</b>	<b>9600-06-220</b>	<b>12,230.00</b>
96 x 22 x 61	4	<b>9600-62</b>	<b>19,704.00</b>	<b>9600-62-220</b>	<b>19,704.00</b>	<b>9600-07</b>	<b>23,041.00</b>	<b>9600-07-220</b>	<b>23,041.00</b>
144 x 22 x 61	6	<b>9600-63</b>	<b>29,849.00</b>	<b>9600-63-220</b>	<b>29,849.00</b>	<b>9600-08</b>	<b>34,854.00</b>	<b>9600-08-220</b>	<b>34,854.00</b>



check\*s

## CLEAN-ZONE FLOOR COVERINGS

These cleanroom floor coverings by Dycem remove the finest particles of foot-borne contamination without any tack carry-over or damage to shoe covers.

- Removes contaminating particles from shoes and wheels
- Non-toxic, chemical resistant material tolerates heavy loads and is not affected by X-rays and gamma rays
- Prevents growth of common bacteria (tested on cultures of *Pseudomonas Aeruginosa* and *Staphylococcus Aureus*)
- Coefficient of Friction: 3.5μ, using "Tortus" floor friction tester
- Heat Resistance: 32°F to 122°F (0°C to 50°C)
- Load Resistance: 570 lbs./sq. in. using a 4000 kg track on 4 wheels, each contact area being 25 sq. cm
- No evidence of erythema, edema or other skin reaction after 48-hour period of constant contact
- Easy to clean with a detergent solution and squeegee
- Includes flooring adhesive and a seam sealer kit

[View](#) online product page.

Size ft.*	Clean-Zone: Standard (Non-dissipative)				Clean-Zone: Standard (Non-dissipative)				Clean-Zone: Static Dissipative*			
	Blue		Grey		Red		Green		Blue		Grey	
	Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each
10' x 6'6"	3801-00	3,421.00	3801-01	3,421.00	3801-02	3,421.00	3801-03	3,421.00	3801-16	3,373.00	3801-17	3,373.00
20' x 6'6"	3801-04	6,132.00	3801-05	6,132.00	3801-06	6,132.00	3801-07	6,132.00	3801-18	6,745.00	3801-19	6,745.00
30' x 6'6"	3801-08	9,198.00	3801-09	9,198.00	3801-10	9,198.00	3801-11	9,198.00	3801-20	10,118.00	3801-21	10,118.00
40' x 6'6"	3801-12	12,264.00	3801-13	12,264.00	3801-14	12,264.00	3801-15	12,264.00	3801-22	13,490.00	3801-23	13,490.00

\* Runner sizes above. Also available in mats and for wall-to-wall installation

## Crystalline Series SD Vinyl

- Ideal KV rating for use in health care or R&D cleanroom
- Can be seam welded flash covered to create hospital-grade cleanroom floor covering
- Antimicrobial agents inhibit growth of MRSA on flooring
- Meets multiple static-control industry standards, including ANSI ESK S20.20, FAA O19E and NFPA 99

**Call Terra for a quotation on this and other cleanroom-compatible flooring options. All are easy**

**to keep clean with a regular maintenance program and come with a lifetime warranty on static-control properties. Installation services available.**



Foot Valve

Electronic-Eye Sensor

## LAVATORY SINKS

Eagle Group Freestanding units feature a marine edge and gooseneck spout faucet, soap dispenser and basket drain. Units are available with foot valve or electronic-eye sensor operation.

- Made with heavy gauge 304 stainless steel all-welded construction
- Bowl Dimensions: 15.75"W x 19.75"D x 8.875"H
- Overall Dimensions: 23"W x 24.312"D
- Sump: 4.75" diameter
- Marine edge feature retards spillage
- Basket-type waste drain fits sink bowls with a 3.5" opening and features a 1.5" outlet
- Splash-mount gooseneck dispenser
- Hands-free models meet USP 797 requirements

[View](#) online product page.

### Lavatory Sinks with Marine Edge

Spout Faucet Operation	Cat. #	S/Each
Foot Valve	1372-90	1,318.00
Electronic-Eye Sensor	1372-91	1,765.00

# CLEANROOM MIRRORS

## Framed and Frameless Mirrors

Terra's cleanroom mirrors mount flush to the wall to eliminate gaps where microbes can form. Easy to install, they offer a convenient way for operators to conduct a visual self-check to ensure compliance with cleanroom gowning protocol.

**Wall mounted** mirrors save floor space and come in two designs:

**Framed Mounting** supports various mirror sizes. The mirrors takes only minutes to install. A sloped stainless steel frame is easy to clean.

**Frameless Mounting** eliminates germ traps and cracks for easy cleaning. These units are ideal for aseptic facilities. Recessed mounting brackets hold mirror tight against the wall to eliminate gaps.

Size W" x H"	With Frame		Frameless	
	Cat. #	\$/Each	Cat. #	\$/Each
36 x 72	5252-52A	1,388.00	5252-58B	1,217.00
24 x 36	5252-53	937.00	5252-61B	859.00
18 x 24	5252-54	638.00	5252-60B	558.00
24 x 72	5252-55	1,144.00	5252-59B	1,001.00
24 x 48	5252-56	1,072.00	5252-63B	979.00
18 x 36	5252-57	844.00	5252-62B	807.00

Click [here](#) to view Cleanroom Mirrors online product page.



No. 5252-54



No. 5252-60B



Frameless Wall-Mount No. 5252-58B

## GOWNING ROOM BENCHES

- Terra's fully passivated electropolished 304 stainless steel finish meets the most stringent cleanliness requirements—certified Class 1 compatible! [View](#) online product page.
- Optional bootie racks provide convenient storage slots
- Variety of frame and top configurations to suit every preference
- Free-standing benches have leveling glides

### .375" Rod Top Cylinder Frame

L" x W" x H"	304 Stainless Steel		316 Stainless Steel	
	Cat. #	\$/Each	Cat. #	\$/Each
36 x 16 x 18	9602-96	1,564.00	9602-96-316	1,829.00
48 x 16 x 18	9602-97	1,791.00	9602-97-316	2,295.00
72 x 16 x 18	9602-99	2,246.00	9602-99-316	2,750.00
84 x 16 x 18	9600-02	2,454.00	9600-02-316	3,007.00



0.375 Rod Top Cylinder Frame

### Solid Top Square Tube Frame

L" x W" x H"	304 Stainless Steel		316 Stainless Steel	
	Cat. #	\$/Each	Cat. #	\$/Each
36 x 16 x 18	1530-25-2	922.00	1530-25-2-316	1,121.00
48 x 16 x 18	1530-26-2	1,017.00	1530-26-2-316	1,292.00
60 x 16 x 18	1530-27-2	1,188.00	1530-27-2-316	1,321.00
72 x 16 x 18	1530-28-2	1,268.00	1530-28-2-316	1,411.00
84 x 16 x 18	1530-29-2	1,181.00	1530-29-2-316	1,497.00



Fixed-Mount  
Solid Top



Free-Standing Solid Top

### Tubular Top Square Tube Frame


L" x W" x H"	304 Stainless Steel		316 Stainless Steel	
	Cat. #	\$/Each	Cat. #	\$/Each
48 x 16 x 18	1530-11-2	1,801.00	1530-11-2-316	2,015.00
84 x 16 x 18	1530-14-2	2,462.00	1530-14-2-316	2,886.00

### 25" Rod Top Square Tube Frame

L" x W" x H"	304 Stainless Steel		316 Stainless Steel	
	Cat. #	\$/Each	Cat. #	\$/Each
48 x 16 x 18	1560-11-2	1,681.00	1560-11-2-316	1,959.00



Free-Standing Rod Top

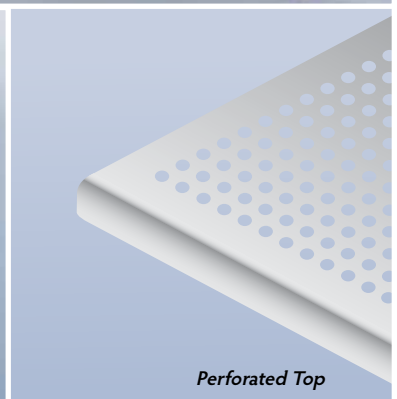

Perforated Top

# PURIFIER LOGIC+ CLASS II BIOSAFETY CABINETS (BSC)



## Purifier® Logic®+ Class II, Type A2 (BSC) 70% Air Recirculation/ 30% Exhaust

**Applications:** Used for containing substances generating hazardous airborne particulates such as antineoplastic drugs, genetic material, carcinogens, and allergens.

**Airflow Pattern:** Discharges 30% of air and recirculates approximately 70% of the HEPA-filtered air through the cabinet. Discharges HEPA-filtered exhaust air directly into lab or into exhaust system with an optional Canopy Connection.

Other sizes available. [View](#) online product page..

Purifier Logic+ Class II Type A2 Bio Safety Cabinets by Labconco				
Size	Dimensions W" x D" x H"	Cat. #	S/Each	
4' with 10" sash opening, 115V	54.3 x 31.2 x 89.2-95.2	3642-00**	9,460.00	
4' with 8" sash opening, 115V	54.3 x 31.2 x 89.2-95.2	3642-06**	9,460.00	
4' with 8" sash opening, 115V	54.3 x 31.2 x 89.2-95.2	3645-41*	8,940.00	
6' with 10" sash opening, 115V	78.3 x 31.2 x 89.2-95.2	3642-18**	11,657.00	
6' with 8" sash opening, 115V	78.3 x 31.2 x 89.2-95.2	3642-22**	11,657.00	

\* UV Light, Service Fixture, Vacu-Pass Portal (Base stand not included)

\*\* UV Light, Service Fixture, Vacu-Pass Portal and Base Stand

Click [here](#) to see more sizes, electrical configurations and options.



## Purifier Logic+ Class II, Type B2 (BSC) 100% Exhaust

**Applications:** Used for containing agents treated with volatile toxic chemicals and radionuclides; antineoplastic drugs, genetic material, asbestos and substances that generate hazardous airborne particulates.

**Airflow Pattern:** A dedicated exhaust system and remote blower discharge 100% of the filtered exhaust air from the laboratory. Models are designed to be hard-ducted to the outside.

Other sizes available. [View](#) online product page..

Purifier Logic+ Class II Type B2 with 8" sash, 115V by Labconco				
Description	4' Nominal Width 54.3W x 31.2D x 72.6H inches		6' Nominal Width 78.3W x 31.2D x 72.6H inches	
	Cat. #	S/Each	Cat. #	S/Each
Standard	3651-60-220	11,834.00	3651-64	13,768.00
Base Stand	3651-61	12,334.00	3651-65	14,292.00
UV Light, Service Fixtures, Vacu-Pass Portal	3651-62	12,326.00	3651-66	14,259.00
UV Light, Service Fixtures, Vacu-Pass Portal, Base Stand	3651-63	12,825.00	3651-67-220	14,783.00

Click [here](#) to see more sizes, electrical configurations and options.

## Features of Labconco's Purifier Logic+ Class II, Type A2 and Type B2 Biosafety Cabinets

Ergonomically designed for operator comfort and safety, Purifier Logic+ Class II, Type A2 and B2 biosafety cabinets protect users, products and environments from hazardous agents that require Biosafety Level 1, 2 or 3 containment.

**Performance:** The Electronically Commutated Motor (ECM) and the Constant Airflow Profile (CAP) Technology in the Purifier Logic+ create an intelligent and accurate BSC able to maintain proper airflow. The ECM uses 60% less energy, generates less heat, is 50% quieter and has greater torque compared to conventional motors. CAP Technology eliminates the need for airflow sensors and manual adjustment by working with the ECM for precise control of airflow.

**Safety:** Units meet or exceed all minimum requirements set by NSF International including 99.99% efficient HEPA filters and nominal inflow of 105 fpm. The line of sight LCD, in constant communication with the ECM,

monitors and displays cabinet performance. The LCD has easy readability and an easy to understand full sentence feedback that eliminates guesswork. The "Filter Remaining" bar graph alerts when filter level is down to 20%. Visual and audible alarms alert users in the event of cabinet errors. The durable UV-opaque safety glass and stainless steel is easy to clean and decontaminate.

**Comfort:** Models are ergonomically designed with ADA compliant touchpad controls and service fixtures. The angled sash, curved inlet grille, flush-mounted electrical duplex covers promote easy clean-up and accessibility. Users have over 27" of viewing height, and the bright, glare-free fluorescent lighting exceeds NSD requirements.

**Sustainable Design:** Contributes to satisfying EA Credit 1 under LEED, MR Credit 4 with 8.5% pre-consumer and 54.5% post-consumer recycled content.





Washes and dries general purpose labware



Washes and dries narrow-neck and general purpose labware

### SteamScrubber Glassware Washers

The SteamScrubber meets the modern laboratory's demand for excellent cleaning of general purpose labware. Units are made of stainless steel top and bottom racks with basket inserts able to accommodate beakers and other wide-mouth glassware including BOD bottles, petri dishes, culture tubes and small utensils. ADA compliant models are also available. [View](#) online product page.

- Material 304 Stainless Steel door, tank, upper and lower wash arms
- Upper rack features additional wash arm and side release latches
- Water temperature for 115V: 93°C
- LCD information center for customizing cycles and monitoring operation
- Water recirculation rates of 96 gal/min for 115V models
- Dual pumps for washing and draining
- Built-in purified water pump for bringing in non-pressurized or pressurized purified water into tank for up to six pure water rinses
- Built-in steam generator produces hot vapor for penetrating and removing dried residue on glassware
- Manual-fill detergent dispenser for powder or liquid detergent; manual-fill rinse aid solution dispenser
- Built-in forced air drying up to 99 minutes and programmable from 38 – 70°C
- 115 V models have seven programs: Rinse Only, Plastic, Glass, Glass Plus, Scientific, Scientific Plus and Dry Only.
- Alarms with display and user-set delayed start (up to 8 hours)
- Compliance: CAN/CSA C22.2, CE, ETL, UL (select models)

### FlaskScrubber Glassware Washers

Designed to wash and dry narrow-neck and general purpose labware, these units are also available in ADA compliant models. The FlaskScrubber features a lower spindle rack that holds up to 36 pieces of narrow-neck glassware such as volumetric flasks. [View](#) online product page.

- Material: 304 Stainless steel
- Water temperature reaches 82°C for 115 V models
- LCD information center customizes cycles and monitors operation including internal water temperature
- Water recirculation rates of 96 gal/min for 115 V models
- Dual pumps for washing and for draining reduces cross contamination
- Built-in purified water pump for non-pressurized or pressurized purified water into tank for up to six pure water rinses
- Built-in steam generator produces hot vapor for penetrating and removing dried residue
- Built-in forced air drying into tank up to 250 minutes and programmable from 38 – 70°C
- Manual-fill detergent dispenser for powder or liquid detergent
- Manual-fill rinse aid solution dispenser
- One-piece, stainless steel, fine mesh particle drain filter traps debris in tank
- Compliance: UL 61010-1, CAN/CSA C22.2 No. 61010.1, ETL listed (select models)

SteamScrubber					
Dimensions W" x D" x H"	Type	Power (V)	Window & Light	Cat.#	S/Each
24.1 x 27.4 x 34.1	Undercounter	115	No	<b>6921-08A</b>	<b>6,681.00</b>
24.1 x 27.4 x 34.1	Undercounter	115	Yes	<b>6921-45</b>	<b>7,337.00</b>
24.2 x 27.5 x 34.2	Freestanding	115	No	<b>6921-10A</b>	<b>7,057.00</b>
24.2 x 27.5 x 34.2	Freestanding	115	Yes	<b>6921-47</b>	<b>7,713.00</b>
24.1 x 27.4 x 32.9-34.9	ADA-Compliant	115	No	<b>6921-70</b>	<b>6,681.00</b>
24.1 x 27.4 x 32.9-34.9	ADA-Compliant	115	Yes	<b>6921-71</b>	<b>7,337.00</b>

FlaskScrubber					
Dimensions W" x D" x H"	Type	Power (V)	Window & Light	Cat.#	S/Each
24.1 x 27.4 x 34.1	Undercounter	115	No	<b>6921-02A</b>	<b>8,645.00</b>
24.1 x 27.4 x 34.1	Undercounter	115	Yes	<b>6921-41</b>	<b>9,293.00</b>
24.2 x 27.5 x 34.2	Freestanding	115	No	<b>6921-04A</b>	<b>9,017.00</b>
24.2 x 27.5 x 34.2	Freestanding	115	Yes	<b>6921-43</b>	<b>9,673.00</b>
24.1 x 27.4 x 32.9-34.9	ADA-Compliant	115	No	<b>6921-72</b>	<b>8,645.00</b>
24.1 x 27.4 x 32.9-34.9	ADA-Compliant	115	Yes	<b>6921-73</b>	<b>9,293.00</b>



**A**



**B**

**A. Basic Laboratory Hoods**

These basic lab hoods are deal for labs requiring light duty applications. The by-pass airflow maintains stable face velocity and vapor-proof or explosion-proof blower models provide safe ventilation. Various system options are available in 47" and 70" widths. Model shown: 3646-05 (70" width). [View](#) online product page.

**B. Fiberglass 30 Laboratory Hoods**

Made with chemical resistant one-piece fiberglass interior and an epoxy-coated steel exterior, these compact by-pass models maintain stable face velocity, and the pivoting air foil maximizes containment. Select models are available with an integral exhaust blower. Model shown: 3646-49 (30" width). [View](#) online product page.

A. Basic 47 Laboratory Hoods: 47"W x 25"D x 53"H*										Work Surface†	
Incandescent Lamp	Blower Motor	Equivalent Resistance		Shipping Weight lbs./kg	115VAC, 60Hz		220VAC, 50Hz***				
		10" dia	12" dia.		Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each	
Vapor Proof	1/3 HP	100'	250'	370/168	<b>3646-00</b>	<b>4,199.00</b>	<b>3646-00-220</b>	<b>4,199.00</b>	<b>3646-02</b>	<b>990.00</b>	
Explosion-Proof**	1/2 HP, EP	100'	250'	375/170	<b>3646-01</b>	<b>4,949.00</b>	<b>3646-01-220</b>	<b>4,949.00</b>	<b>3646-02</b>	<b>990.00</b>	
Basic 70 Laboratory Hoods: 70"W x 25"D x 53"H										Work Surface†	
Vapor Proof	1/4 HP	45'	100'	450/204	<b>3646-05</b>	<b>5,421.00</b>	<b>3646-05-220</b>	<b>5,530.00</b>	<b>3646-07</b>	<b>1,474.00</b>	
Explosion-Proof**	1/4 HP EP	45'	100'	455/206	<b>3646-06</b>	<b>5,946.00</b>	<b>3646-06-220</b>	<b>6,036.00</b>	<b>3646-07</b>	<b>1,474.00</b>	

\* Maximum length of straight duct to achieve 100fpm face velocity. \*\* Bulb not included on explosion-proof models.  
 \*\*\* International electrical configuration. †48"/72"W x 30"D x 1.25" thick black epoxy-coated steel

B. Fiberglass 30 Laboratory Hoods: 30"W x 30.16"D x 48"H*								Work Surface†		
Blower Motor	Equivalent Resistance**		Shipping Weight lbs./kg	115VAC, 60Hz		220VAC, 50Hz***				
	6" dia	8" dia.		Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each	
Yes††	20'	80'	230/104	<b>3646-48</b>	<b>3,828.00</b>	<b>3646-48-220</b>	<b>3,921.00</b>	<b>3646-50</b>	<b>644.00</b>	
None	—	—	210/95	<b>3646-49</b>	<b>3,509.00</b>	<b>3646-49-220</b>	<b>3,614.00</b>	<b>3646-50</b>	<b>644.00</b>	

\* Model 3646-48-220 is 54"H  
 \*\* Maximum length of straight duct to achieve 100fpm face velocity  
 \*\*\* International electrical configuration.  
 † 48"/72"W x 30"D x 1.25" thick black epoxy-coated steel  
 †† 1/10 HP (120V); 1/3 HP (220V)

### C. Protector® XStream® Laboratory Hoods

These high-performance, low-volume benchtop by-pass models provide maximum containment and energy savings. The patented features significantly reduce contaminants near the user's breathing and behind the sash opening. The Protector XStream meets SEFA-1 low velocity hood standards when subjected to ASHRAE 110 test protocol and they yield the lowest required CFM. By-pass models are available in 4-, 5-, 6- and 8-foot widths. Model shown: (5' width). [View](#) online product page.

Applications: Ideal for facilities without central air-handling systems performing general chemistry applications.

- **Upper Dilution Air Supply** bathes sash interior with clean air
- **Rear Downflow Dual Baffle System:** primary and secondary baffles
- **Clean-Sweep™ Sash Handle** directs chemical fumes away from user's breathing zone; **Opti-Zone™** lowers standard face velocity variations in comparison with other baffles; **Eco-Foil™ Air Foil** lower energy usage by 7 – 10% compared to flat air foils; **Cord-Keeper™** Slots located on left and right side of air foil
- **Material:** Powder-coated stainless steel interior with glacier white powder-coated steel exterior

#### C. Protector XStream Laboratory Hoods

Nominal Width Dim (W x D x H)	Cat. #	\$/Each
4' (48.0" x 37.7" x 59.0")	1538-30	6,985.00
5' (60.0" x 37.7" x 59.0")	1538-34	7,016.00
6' (72.0" x 37.7" x 59.0")	1538-38	7,765.00
8' (96.0" x 37.7" x 59.0")	1538-42	11,060.00

### D. Protector® Premier® Laboratory Hoods

As the only high performance hood in the market available with a built-in blower, these benchtop models have excellent containment enhancing features. Unit dimensions match standard lab casework, base cabinets and stands. The Protector Premier is energy efficient, meets SEFA-1 regulations and operates at a face velocity as low as 60 fpm. By-pass models are available in 4-, 5-, 6- and 8-foot widths. Model shown: (4' width). [View](#) online product page.

Applications: General chemistry applications for effective containment of toxic, noxious and other harmful fumes.

- Sleek interior made with an easy to clean seamless one-piece fiberglass liner that is corrosion and chemical resistant
- **Eco-Foil™ Air Foil** saves energy by 7-10% with aerodynamic curve of air sweeping through work surface; **Clean-Sweep™** airflow openings\* promote non-turbulent air streams
- Pre-set baffle(s) with flame spread less than 25 per ASTM E-84.
- 37.5" (95.3 cm) high sightline from the work surface and header panel
- Removable front and side panels, and front service access panels for plumbing and electrical wiring
- **Material:** glacier white powder-coated steel exterior

#### D. Protector Premier Laboratory Hoods

Nominal Width Dim (W x D x H)	Cat. #	\$/Each
4' (48.0" x 31.7" x 59.0")	3649-00*	5,658.00
5' (60.0" x 31.7" x 59.0")	3649-13	6,338.00
6' (72.0" x 31.7" x 59.0")	3649-24	7,011.00
8' (96.0" x 31.7" x 59.0")	3649-36	9,748.00

\* With built-in blower

All models: 100-115 V models listed meet UL standards. 208 – 230 V (CE Listed) models also available. Models with optional service fixtures, electrical duplex, and built-in exhaust blower also available. Explosion proof model available with Protector XStream. Contact Terra for details about optional and required accessories.



C

Performs maximum containment under adverse conditions



D

Sleek corrosion and fire resistant interior

# VALULINE™ WHISPERFLOW™ POLYPROPYLENE LAMINAR FLOW HOODS

Terra's versatile laminar flow hoods provide a particle-free work environment on any available work surface.

- Portable, economical system converts any benchtop surface into a vertical or horizontal laminar flow station (select 36" or 48" width)
- Air flow speed exceeds 90 feet/minutes (measured with HEPA filter)
- Quiet operation: 54 dBA measured 30" from filter face
- Polypropylene hood construction resists a wide range of chemicals, including alcohol and other biocides
- Includes built-in polypropylene bottom with spill tray and coved seams for easy cleaning

## Units consist of two modules:

### 1. Fan/Filter unit (FFU) for quiet, reliable operation

The FFU houses a HEPA filter, rated 99.99% efficient with 0.3 micron particles. Internal baffle system ensures uniform face velocity, and its 54 dBA noise rating ensures quiet operation. The low vibration level ensures minimal disruption of high-precision assembly or test procedures performed inside the hood. ULPA FFUs, rated 99.99% efficient @ 0.12µm particles, along with ionization units are also available.

### 2. Polypropylene frame for chemical resistance

The 0.5" (13 mm)-thick polypropylene construction offers excellent chemical compatibility, durability, and cleanliness. A hinged front access shield, made of static-dissipative PVC, restricts the air exit and enhances laminar flow. Continuous seams and coved corners simplify cleaning.

[View](#) online product page.



No. 1688-40, Vertical Laminar Flow Hood



No. 1688-42, Horizontal Flow Hood

## ValuLine Whisper Flow Polypropylene Laminar Flow Hoods

Outside Dimensions (inches)	Power	Vertical Flow ValuLine WhisperFlow Hood		Horizontal Flow ValuLine WhisperFlow Hood		Corresponding HEPA Fan/Filter Unit*	
		Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each
48.75 x 24.75 x 39, 42, with FFU	120VAC, 60Hz	1688-40	1,618.00	1688-42	1,466.00	6601-24-H	740.00
	220VAC, 50/60Hz	1688-40-220	1,618.00	1688-42-220	1,466.00	6601-24-H-220	845.00
36.75 x 24.75 x 39, 42.5 with FFU	120VAC, 60Hz	1688-41	1,452.00	1688-43	1,642.00	6601-23-H	740.00
	220VAC, 50/60Hz	1688-41-220	1,452.00	1688-43-220	1,642.00	6601-23-H-220	845.00

\* ULPA models available

## Corresponding Tables

Tables feature powder-coated, adjustable bases and choice of sealed laminate or 304 stainless steel tops.

### Corresponding Tables

For Hood Style	Laminate Top		304 Stainless Steel Top	
	Cat. #	S/Each	Cat. #	S/Each
<b>Vertical Flow</b>				
49"W x 25"D	1688-81	454.00	1688-83	852.00
37"W x 25"D	1688-82	557.00	1688-84	658.00
<b>Horizontal Flow</b>				
49"W x 39"D	1688-85	590.00	1688-87	944.00
37"W x 39"D	1688-86	534.00	1688-88	855.00



## IonBar™ Static Neutralizing Bar

- Low Voltage
- Includes mounting kit for installation to Fan/Filter Unit
- For use with WhisperFlow, ValuLine WhisperFlow and USP-797 Compounding Aseptic Isolators

### IonBar™ Static-Neutralizing Bar (with Installation Kit)


For Hood Width/bar length	110VAC, 60Hz		220VAC, 50/60 Hz	
	Cat. #	S/Each	Cat. #	S/Each
36"/33"	2005-48	709.00	2005-48-220	720.00
48"/44"	2005-49	810.00	2005-49-220	820.00

# PCR WORKSTATIONS

Terra manufactures turnkey laminar flow Polymerase Chain Reaction (PCR) Hoods with laminar flow HEPA filtering for cleanliness. The air-velocity meter monitors air flow. These lightweight models are made with acrylic or static-dissipative PVC panels. Models are available with a stainless steel work surface..

- Portable, economical turnkey hood converts any benchtop surface into a controlled PCR work station
- Safe UVC Disinfection Module with "exposure switch" to protect users from harmful UV light
- Fully-enclosed environment keeps UV energy safely contained during sterilization
- Samples and equipment introduced via large front sash
- Full-length front access shield enhances laminar flow when closed and gives users complete access to samples and equipment when open. It is held open, or safely closed during UV decontamination, with magnetic latches

[View](#) online product page.

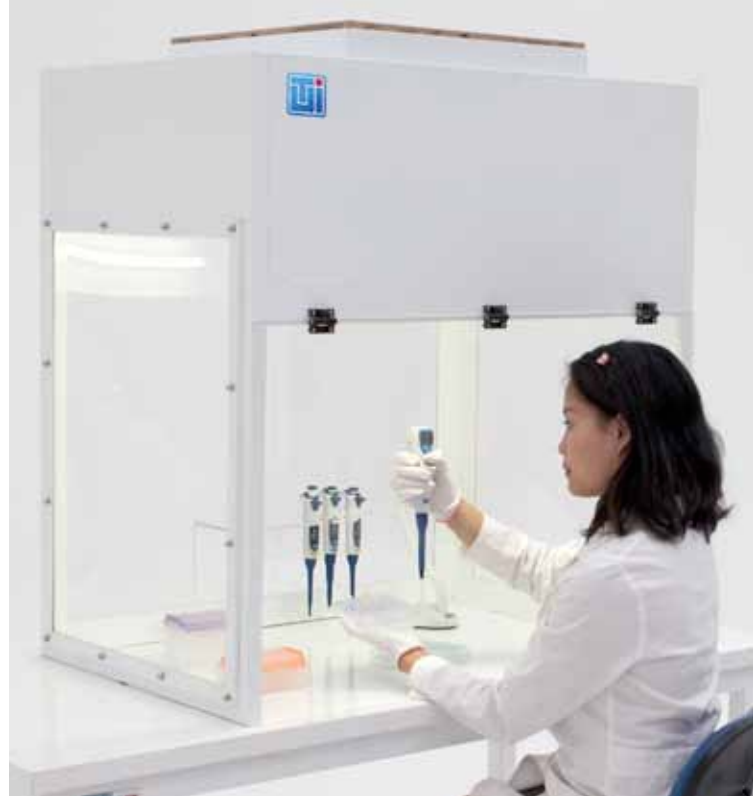

PCR Workstation (No. 1692-90) on a polypropylene table (order separately)

PCR Hood Material	Dimensions W" x D" x H"	Cat. #	S/Each
Acrylic	36 x 24 x 30.25	1692-90	3,723.00
Acrylic	48 x 24 x 30.25	1692-91	3,986.00
Static-dissipative PVC	36 x 24 x 30.25	1692-93	4,466.00
Static-dissipative PVC	48 x 24 x 30.25	1692-94	4,779.00
Tempered Glass	36 x 24 x 30.25	1692-95	3,406.00
Tempered Glass	48 x 24 x 30.25	1692-96	3,645.00



## Pipette Shelf

Portable pipette shelf organizes pipettes and micro-well. Shelf features four notches to hold single-channel pipettes.

Dimensions: 14" W x 5" D x 8" H

Material: Acrylic or Static-Dissipative PVC

Material	Cat. #	S/Each
Acrylic	1692-99	162.00
Polypropylene	1692-98	162.00



## mLine® Pipette Multipacks by Sartorius

These multipacks include useful mechanical pipette accessories in one package and they are a convenient way to supply a new pipette workstation or to replace used mechanical pipettes.

Multipacks	Cat. #	S/Each
Pipette 3-pack 10	PP03-20	776.00
Pipette 3-pack 20	PP03-21	776.00
Pipette 4-pack	PP03-22	975.00
Pipette 3+1 pack	PP03-23	1,287.00
Pipette 5-pack	PP03-24	1,209.00



## Ultra-Violet C Sanitizing Lamp

**99+% kill rate for common bacteria and viruses within 2 minutes!**

Long-lasting, low-mercury lamps can be installed in most Terra stainless steel chambers including BioSafe® Glove Boxes and Compounding Aseptic Isolators. Prices below include installation in specified chamber.

Length	Cat. #	S/Each
21"	3305-90	426.00
33"	3305-91	471.00
61"	3305-92	594.00

# SPECIALTY HOODS

## A. HEPA-Filtered Ventilation Hood

Perfect for containing contaminants produced during benchtop operations, including powders and dust. Reverse-flow fan/filter unit micro-filters air for safe indoor release.

[View](#) online product page.

## B. Explosion-Proof Hood

Motor, fan and LED light classified for use in Class I, Division 1 hazardous locations, per NEC code, making this enclosure suitable for use around potentially flammable or explosive substances.

[View](#) online product page.





## GERMFREE LFGI LAMINAR FLOW GLOVE BOX/ISOLATOR for Biohazard Containment

Germfree's LFGI Laminar Flow Glove Box/Isolator is designed with positive and negative configuration options. Units meet NIOSH recommendations and USP-797 requirements for a Compounding Aseptic Containment Isolator (CACI) and USP-797 regulations for a Compounding Aseptic Isolator (CAI). The ergonomic glove ports and the HEPA filters provide users the highest level of comfort and protection from microbiological particulates, dust, powders and aerosols.

- Units configured to positive or negative pressure operation; can be adjusted by a certifier
- Antechamber and waste and sharps removal tubes can be installed on either side of unit
- Three exhaust options can be factory-set or changed by a certifier when the unit is in-place
- Protects operator and product in the event of a containment breach with Inward/outward face velocity of 95 – 100 linear feet per minute at glove port opening
- 10" range variance of hydraulic-assist, height-adjusting stands allow operators to sit or stand comfortably for extended time periods
- Oval glove ports for maximum range of motion

### Specifications

Electrical:	115 volt, 15 amp, 60 Hz (220/50-60 Hz also available)
Amperage Rating:	15
Antechamber Dimensions:	Sealed two-door airtlock 16" W x 13.5" D x 14.25" H
Configuration Options:	Positive and negative pressure operation
Lighting:	T8 fluorescent light externally mounted for optimum lighting and minimal heat build-up; ON/OFF lighted indicator switches for blower and lighting

- Full framed, standard-size minipleat HEPA filters provide 100% filtering of inlet and exhaust air from both the work area and the antechamber for a fully contained environment
- 4" diameter trash tube (flanged for waste bag/container connection) and straight 2.5" diameter sharps tube (for quick and easy drop of large syringes) include easy to remove seal/stopper to maintain work area containment
- Meets or exceeds ISO 14644-1 for Class 5 air quality
- Two-year manufacturer warranty for parts and labor from original purchase date
- **Safety features:** lock-out handle with key, low pressure alarm and digital pressure readout, glove change without breaking containment, standard locking casters
- **Ergonomic features:** two part sleeve/glove system fits various commercially available glove types and sizes; extra-large oval gloveports provides range of movement and accommodates many body types; 3" arm rest of gloveports promotes comfort and reduces fatigue; large viewing panel minimizes glare and strain; integrated footrest
- Construction allows optional outside venting of exhaust air
- Clean air plenum external to work area; sealed outlet in work area; includes 10 ft. hospital grade power cord with molded grounded plug
- Waste and sharps disposal system for CACI also available

### LFGI Laminar Flow Glove Box/Isolator

Overall Dimensions W" x D" x H"	Work Area Dimensions W" x D" x H"	Glove Ports	Cat #	S/Each
54 x 32 x 80 (39" wide at base)	34.5 x 24.5 x 29	2	<b>5607-15</b>	<b>19,945.00</b>
66 x 32 x 80 (50" wide at base)	46.5 x 24.5 x 29	3	<b>5607-16</b>	<b>21,241.00</b>
90 x 32 x 80 (74" wide at base)	70.5 x 24.5 x 29	4	<b>5607-17</b>	<b>26,342.00</b>

Call Terra Universal at 714-578-6100 and speak to a product expert about available accessories.

[View](#) the LFGI training video.

# VERSAFLOW LAMINAR FLOW COMPOUNDING ASEPTIC ISOLATOR

Germfree designed the VersaFlow for applications such as IV compounding in hospital pharmacies and cleanroom environments. Fan units bathe the work area with unidirectional HEPA-filtered air with minimal turbulence for a sterile work environment.

- Meets USP-797 regulations and provides ISO Class 5/Class 100 HEPA filtered unidirectional vertical (laminar) airflow for positive pressure (non-hazardous) compounding
- Units can be converted to a Vertical Laminar Flow Workstation
- **HEPA** filter removes organisms and particulates 0.3 microns in size with 99.99% efficiency
- Straight sides and back optimize work area to fit various shapes and types of pharmacy equipment and automated compounders
- **Waste Removal:** 4" diameter trash tube and seal/stopper; 3" diameter sharps tube for syringe disposal; adjustable sharps container shelf
- **Filtration:** Standard-size minipleat HEPA filters; full framed; filters 100% of inlet and exhaust air from work area and antechamber; full coverage and front-loading HEPA filters
- **Safety:** Inward/outward face velocity of 95 – 100 linear ft. per min.; includes lock-out handle and key and standard integrated stainless steel stand; digital pressure readout; glove changes without breaking containment
- **Ergonomics:** Two part sleeve/glove system fits various commercially available glove types and sizes; extra-large oval glove ports with 3" arm rest promotes wide range of movement; angled large viewing panel minimizes glare and strain
- Two-year manufacturer warranty

[View](#) online product page.



*Meets all requirements for USP-797 compliance. 100% stainless steel construction. Unidirectional vertical laminar airflow system maintains ISO Class 5/Class 100 air quality under dynamic conditions.*

## VersaFlow Laminar Flow Compounding Aseptic Isolator

Dimensions W" x D" x H"			Glove Ports	Running Amperage	Cat #	\$/Each
Overall	Work Area	Ante-chamber				
63 x 32 x 79.5	33 x 27.5 x 32	14 x 27.5 x 32	2	6	5607-19	12,252.00
88 x 32 x 79.5	49 x 27.5 x 32	22 x 27 x 32	3	6	5607-20	13,280.00
92 x 32 x 79.5	55 x 27.5 x 32	19 x 27.5 x 32	4	7	5607-21	14,900.00

# SEA-III CLASS III BIOSAFETY CABINETS (BSC)

The **SEA-III BSC by Germfree** is an ergonomically designed standard sized cabinet ideal for modern microbiology labs tasked with handling a wider range of hazardous biological materials.

- Features HEPA filtered air and double HEPA filtered exhaust air
- Boosts preparedness of lab when working with emergency response networks for containing higher risk biological agents
- Cost-effective stainless steel models with ergonomic design promotes natural arm position, extends reach and reduces fatigue
- Exhaust system requirements: 50 cfm @ 2" H<sub>2</sub>O (8.5 M3/hr. @ 500 Pa)

### Construction:

- All welded 12-gauge type 316L (2.46 mm thick ISO 3406 Type A4) stainless steel, interior coved corners and radius bends
- 180-grit pharmaceutical grade (#4) finish facilitates cleaning and decontamination

[View](#) online product page.

Contact a Terra product expert at 714-578-6100



*Safe, affordable, and ergonomic. Ideal for integrating Class III BSC into complex lab environments*

## SEA-III Glove Boxes

Glove Model	Interior Dims W" x D" x H"	Overall Dims. with 36" stand W" x D" x H"	Cat #	\$/Each
2	41.25 x 22 x 29.25	60.25 x 24.75 x 76.375	5607-25	45,441.00
3	54 x 22 x 29.25	72.25 x 24.75 x 76.375	5607-26	51,612.00
4	78.125 x 22 x 29.25	95.125 x 24.75 x 76.375	5607-27	61,677.00

# LFGI RADIOPHARMACY ISOLATORS



34" work area. Compounding Aseptic Containment Isolator (CACI) completely shields users from radioactive material

The Germfree Compounding Aseptic Containment Isolator (CACI) with .25" lead shielding provides advanced user and product protection when compounding sterile radiopharmaceuticals. These barrier isolators provide cleanroom conditions within a contained workspace and are ideal for use in clinics, and hospital and pharmacies. [View](#) online product page.

- Meets USP-797 compliance without expense for pharmacy ventilation renovations
- ISO Class 5/Class 100 Isolator eliminates requirement for an ISO Class 8 cleanroom
- .25" lead shielding (located in back, sides, bottom and front of work area) protects while compounding sterile radiopharmaceuticals
- Fits Atomlab and other dose calibrators
- Provides fully controlled environment with 100% HEPA filtration of supply and exhaust air from work area and antechamber
- Stainless steel construction inside and outside encapsulates lead between interior and exterior panels
- **Safety Features:** Key accessed lock-out handle for work area; digital pressure gauge with audible and visual low pressure alarm; operator/product protection in event of glove loss with inward face velocity of 95 – 100 linear feet per minute at gloveport opening; glove change without breaking containment; standard locking casters; undergoes extensive physical testing for assurance that each unit meets performed requirements; independent certification required prior to use.
- **Sharps and Waste Disposal:** sharps container surrounded by individual .25" lead shields located under isolator; 2.5" diameter sharps tube for quick drop of large syringes; includes easy to remove shielded seals/stoppers to maintain work area containment.

## LFGI Series Radiopharmacy Isolator

Dimensions		Cat #	\$/Each
Overall W" x D" x H"	Work Area W" x D"		
36 x 34 x 79.5	34 x 24	5607-22	42,687.00
Exhaust Transition		5607-23	651.00

# CLASS II TYPE A/A2 BIOSAFETY CABINETS



Protects user, product and environment



Germfree's **RADIOSAFE Series** Class II, Type A or A2 Biological Safety Hoods are 100% stainless steel units designed to compound sterile radiopharmaceuticals. Units continuously bathe the work area with positive pressure ISO Class 5/Class 100 HEPA filtered air and negative inward airflow to protect product from contamination and promote user safety from hazardous samples. [View](#) online product page.

- Meets all requirements for USP-797 compliance
- Provides positive pressure ISO Class 5/Class 100 HEPA filtered air and negative inward airflow
- Includes 37" tall all-welded stainless steel stand
- **Lead Shielding:** 2" thick lead-lined dose calibrator housing; dose calibrator monitor arm; lead on sides, back and bottom (3/4" thick); 37" tall all-welded heavy duty stainless steel stand
- **Performance Data:** Passes Biological Tracer Containment Tests of the National Institutes of Health (NIH), the National Cancer Institute (NCI); NRTL listed with MET Labs to comply with UL 1262
- HEPA filter life extended by high capacity motor/blower with speed control
- Externally mounted fluorescent lights minimize heat build-up
- I.V. bar in work area includes 12 stainless steel hooks

## Compliance

- Class III Biological Safety Cabinet as defined by the CDC/NIH publication "Biosafety in Microbiological and Biomedical Laboratories" 5th Edition (BMBL)
- System complies with standard EN 12469-2000

## RADIOSAFE Series Radiopharmacy Hoods

Overall Dims. w/ Stand W" x D" x H"	Overall Dims. w/o Stand W" x D" x H"	Work Area Dimensions W" x D" x H"	Cat #	\$/Each
50 x 27 x 94	50 x 27 x 57.5	48 x 22 x 29		





Smooth interior with radius corners for easy sterilization!



Available with sloping bottom and drain valve for disinfectant wash-down

## BIOSAFE® ASEPTIC PROCESSING ISOLATORS

- Smooth, ultra-clean surfaces eliminate germ traps, simplify cleaning and disinfection
- Continuous-seam interiors create a sealed chamber
- Tempered glass or polycarbonate viewing windows allow full view of chamber
- Includes fluorescent illuminator (UV sterilization bulbs available)
- Optional access panel available for equipment transfer
- Custom configurations available—call to discuss your requirements!

[View](#) the BioSafe Aseptic Processing Isolator by Terra Universal.

### BioSafe Glove Box — All models are 120VAC; 220VAC models available

Position	Window Material	304 Stainless Steel				316 Stainless Steel			
		Single		Twin		Single		Twin	
		37.5"W x 29"/24"D x 39"H		69"W x 29"/24"D x 39"H		37.5"W x 29"/24"D x 39"H		69"W x 29"/24"D x 39"H	
		Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each
Glove Box with Right-Side Air Lock*	Polycarbonate	9670-16C	19,702.00	9670-19C	24,938.00	9670-48B	27,738.00	9670-51B	35,172.00
	Safety Glass	9670-17C	20,897.00	9670-20C	26,137.00	9670-49B	29,468.00	9670-52B	36,813.00
Glove Box with Left-Side Air Lock*	Polycarbonate	9670-22C	19,672.00	9670-25C	24,974.00	9670-54B	27,738.00	9670-57B	35,172.00
	Safety Glass	9670-23C	21,114.00	9670-26C	26,137.00	9670-55B	29,468.00	9670-58B	36,813.00
Glove Box with Dual-Side Air Locks*	Polycarbonate	9670-28C	24,670.00	9670-31C	30,147.00	9670-60B	34,952.00	9670-63B	42,431.00
	Safety Glass	9670-29C	25,896.00	9670-32C	31,310.00	9670-61B	36,683.00	9670-64B	44,028.00

\* Air lock dimensions: 16"W x 16"D x 16"H

Each chamber includes pair of 10"-diameter glove ports (twin models include two pairs).

### Stands

	For Single		For Twin	
	Cat. #	S/Each	Cat. #	S/Each
Powder-Coat Stand	9670-41	627.00	9670-43	751.00
Stainless Steel Stand	9670-40	1,319.00	9670-42	1,447.00

### Removable Panel

Allows you to remove and reseal front viewing window to allow transfer of large process equipment. Poured polyurethane BioSeal™ is easy to clean and sterilize.

	Cat. #	S/Each
Single Chamber	9670-35	2,756.00
Twin Chamber	9670-36	3,308.00



### Glove Box Accessories

- Neoprene sleeve and nitrile glove combination
- One- or two-piece hypalon sleeve and glove
- One-piece neoprene sleeve and glove
- Stainless steel oval ports (other materials and configurations available)

[View](#) more Glove Box accessories.

# USP-797 COMPOUNDING ASEPTIC ISOLATOR

Terra's Stainless Steel and Polypropylene USP-797 Compounding Aseptic Isolators (CAI) are designed with a large ergonomically sloped polycarbonate tilt-up front window for easy insertion of large equipment and front access to rear panels for cleaning and sterilization.

- Low-noise, low-vibration filter/fan unit provides continuous vertical flow of 99.99% particle-free air to meet Class 100 (ISO 5) cleanliness standards
- Sliding door for easy insertion/removal of IV bags
- Magnehelic® gauges monitor internal positive pressure
- Waste port for disposing through glove box floor or side
- All models meet USP-797 Requirements

## Features

Standard ■ Option

- A** HEPA filtration module provides vertical laminar airflow
  - B** Main processing chamber includes IV rod. 10" (254 mm)-diameter glove ports (shown with optional Hypalon gloves) and externally mounted fluorescent illuminator
  - C** Antechamber with separate 1/2"-thick glass access door
  - D** Differential pressure gauges display internal positive pressure
  - E** Status Indicator
  - F** Powder-coated steel stand with leveling feet
- Options include waste chutes and ionizing bar  
 UV Module allows fast, effective sanitizing

## Specifications for Stainless Steel and Polypropylene

Overall dimensions: 50"W x 30"D, at bottom, /27"D, x 38"H, at top, nominal, excluding filter/fan unit.

Easy-Reach: 50"W x 22"D, at bottom, /19"D, at top x 38"H, nominal, excluding filter/fan unit.

Antechamber: 30": 14"W; 22" Easy-Reach: 12.5"W

Processing Chamber: 30": 32.5"W x 29.5"D, at bottom x 38"H, with pneumatic tilt-up door, 27.38"W x 31.5"H opening

[View](#) online product page.



Easy to clean 304 stainless steel model #2900-46C



Sliding glass door



Removable baffle from front



Tilt-up window



IV rod included



Easy-Reach 22" #2900-56 saves space and allows easier reach of back wall and chamber components.

- Housing: 304 or 316 stainless steel, or polypropylene
- Viewing Windows: Polycarbonate, 0.25" (6 mm) thick, with swing access door
- Glove Ports: 10" (254 mm) diameter (order desired gloves separately)
- IV Rod: 0.25" (6 mm) stainless steel rod mounted 3" (76 mm), from the filter face
- Pressure Gauge: 0 – 0.25" Magnehelic® gauges monitors internal positive pressure
- Lighting: External-mount fluorescent fixture
- Gloves and Sleeves** Nitrile, Neoprene and Hypalon gloves and sleeves are available in three sizes and with choice of G.O.S. (for sterile applications) or G.U.S. (protection against hazardous materials) connectors.

**Fan/Filter Unit Specifications**

- Filter/Fan Unit: **30"**: 24" x 48"; **Easy-Reach 22"**: 16" x 48"
- Average CFM: 644 (1094.2 m<sup>3</sup>/hr)
- Air Speed: 100 (low speed); 120 (medium speed); 140 (high speed)
- Prefilter/Exit filter: Fiberglass



[View](#) online product page.



*ValuLine Isolator provides a USP-797-compliant isolator at a lower cost! Polypropylene construction is easy to clean and resists biocides.*

**USP- 797 Compounding Aseptic Isolators—Stainless Steel**

Stainless Steel	120VAC		220VAC	
	Cat. #	S/Each	Cat. #	S/Each
<b>30" Chamber Depth</b>				
304	2900-46C	7,906.00	2900-46C-220	7,906.00
316	2900-45C	9,837.00	2900-45C-220	9,837.00
<b>22" Chamber Depth Easy-Reach</b>				
304	2900-56	8,052.00	2900-56-220	8,052.00
316	2900-57	9,870.00	2900-57-220	9,870.00

**USP- 797 Compounding Aseptic Isolators—Polypropylene**

Cat. #	120VAC		220VAC	
	S/Each	Cat. #	S/Each	Cat. #
<b>30" Chamber Depth</b>				
2900-62	6,194.00	2900-62-220	6,194.00	
<b>22" Chamber Depth Easy-Reach</b>				
2900-58	6,340.00	2900-58-220	6,340.00	



**Stands**

Constructed of all-welded 2" square tubing. All stands raise chambers 28.75" off of floor (add 3" for casters).

<b>Corresponding Stands</b>			
Chamber Depth	Cat. #	S/Each	
30"	1694-81	689.00	
22"	1694-82	679.00	



**IonBar™ Static Neutralizing Bar**

- Low Voltage
- Includes mounting kit for installation to Fan/Filter Unit
- For use with WhisperFlow™, ValuLine™ WhisperFlow and USP-797 Compounding Aseptic Isolators



<b>IonBar Static-Neutralizing Bar (with Installation Kit)</b>					
For Hood Width/bar length	110VAC, 60Hz		220VAC, 50/60 Hz		
	Cat. #	S/Each	Cat. #	S/Each	
36"/33"	2005-48	709.00	2005-48-220	720.00	
48"/44"	2005-49	810.00	2005-49-220	820.00	



All BACTRON,  
BACTRONEZ and  
BACTROX models

**A** BACTRON300 17.6 cu. ft. work space with a 300 petri-plate capacity incubator



**B** BACTRON600 17.6 cu. ft. work space and 600-plate capacity with a rotating shelf and two rear mounted shelves



**C** BACTRON900 17.6 cu. ft. work space and 900-plate capacity with a two-tier rotating shelf and an added rear wall incubator with an independent temperature control

## Features of BACTRON300, 600, 900, and BACTRONEZ:

- Agency Approval: TUV-CUE; Meets EN61010, UL61010 and Can/CSA61010 standards
- Operates as a one-gas (Anaerobic Mixed Gas [AMG]) or two-gas (AMG and nitrogen) system
- Gloveless design with patented cuffs for efficient bare hand manipulation of samples
- Ergonomic arm port door provides flat resting area for user's arm, enhances comfort during extended periods of operation, simplifies access and maintains a strict anaerobic environment
- User-friendly control panel and microprocessor controls with pre-programmed sequence
- Automatic pressure controls provide positive pressure at approximately 3" of water column and shows pressure level
- Airtight construction of heavy duty stainless steel and rigid Plexiglas
- **Gas supply must be purchased separately**
- Two-year manufacturer limited warranty

Shel Lab® manufactures anaerobic chambers in various petri-plate capacities and cubic foot work spaces. Models are designed for microbiology and cell biology sample processes, inoculation, incubation, inspection and recovery applications. Units purchased in the United States include installation and operator training workshops.

## A. BACTRON300

The BACTRON300 continues to be one of the most popular anaerobic chamber models for its size and capacity. Models include standard accessories for easy set-up and optimum productivity. The ample work area still sustains a compact footprint. [View](#) online product page.

Includes: vacuum pump, AMG Regulator, interior electrical outlet, sleeve assembly with medium cuff and 8 Petri racks, installation and training workshop (for USA orders only).

### BACTRON300 Anaerobic Chamber

Description	Cat. #	S/Each
110V	<b>3900-82</b>	<b>19,923.00</b>
220V	<b>3900-82-220</b>	<b>19,923.00</b>

## B – C. BACTRON600 and BACTRON900

BACTRON600 and BACTRON900 Include: vacuum pump, AMG Regulator, interior electrical outlet, sleeve assembly with medium cuff and 10 Petri racks. [View](#) online product page.

### BACTRON600

Description	Cat. #	S/Each
110-120V/60Hz	<b>3900-85</b>	<b>23,020.00</b>
220-240V/50Hz	<b>3900-85-220</b>	<b>23,020.00</b>

### BACTRON900

Description	Cat. #	S/Each
110-120V/60Hz	<b>3900-84</b>	<b>24,149.00</b>
220-240V/50Hz	<b>3900-84-220</b>	<b>24,149.00</b>



Manual or automatic airlock with sliding shelves



Gloveless Design

## D. BACTRONEZ

Modular and economical BACTRONEZ anaerobic chambers can be configured to your specific application requirements. The patented cuffs enable glove-free handling and inspection of samples within a consistent, oxygen-free environment. These anaerobic chambers provide a faster sample turnaround compared to vacuum jars and bags. Units are ideal for research and clinical laboratories handling small volumes of anaerobic samples.

[View](#) online product page.

Includes: Sleeve assembly with medium cuff and interior electrical outlet

### BACTRONEZ 13.7 cu. ft., 300 plate

Description	Cat. #	S/Each
13.7 cu. ft., 110V	<b>3901-00</b>	<b>10,626.00</b>
13.7 cu. ft., 220V	<b>3901-00-220</b>	<b>10,626.00</b>

See Essential Accessories Kit



**D**

Modular unit with 13.7 cu. ft. work space and a 300-Petri plate capacity

## E. BACTROX Hypoxia Chamber

The Bactrox Hypoxia Chamber provides precise control of oxygen and carbon dioxide from a range of 1% to 20% and in increments of 1/10th of a percent. [View](#) online product page.

- Advanced atmospheric PID controller
- Independent incubator (5°C above ambient to 70°C)
- Ultra-fast extra large pass box, vacuum-less sleeve entry
- Vibrant LED exam lights; stainless steel construction
- Independent gas and condensation control
- RSS232; Condensation control; PC calibration of oxygen sensor; independent gas controls

### BACTROX Hypoxia Chamber, 13.7 cu. ft.

Description	Cat. #	S/Each
13.7 cu. ft., 110V	<b>3900-87</b>	<b>20,269.00</b>
13.7 cu. ft., 220V	<b>3900-87-220</b>	<b>20,269.00</b>



**E**

13.7 cu. ft. and 300-plate capacity unit provides precise control of oxygen and carbon dioxide

## Accessories

### F. BACTRONEZ Essential Accessories Kit

- Includes: vacuum pump, foot pedal assembly, AMG regulator, ergonomic grip catalyst holder, exterior LED light, Petri plate racks (2 x 11)
- [View](#) online product page.

Description	Cat. #	S/Each
115V	<b>3901-25</b>	<b>2,828.00</b>
220V	<b>3901-25-220</b>	<b>2,828.00</b>



**F**

Includes all the most used accessories for the BACTRONEZ

### G. BACTRON Sleeve Assembly

For BACTRON and BACTROX chambers. Includes sleeves, cuffs and O-rings. [View](#) online product page.

Cuff Size	Arm Port Door	Cat. #	S/Each
Large	Ergonomic	<b>3901-02</b>	<b>469.00</b>
Medium	Ergonomic	<b>3901-04</b>	<b>469.00</b>
Small	Ergonomic	<b>3901-06</b>	<b>469.00</b>



**G**

### H. Anaerobic Chamber Start-Up Kit

Includes: spare gasket, anatox, chamber cleaner, scratch remover, acrylic cleaner, 10 anaerobic indicator strips, 2 sets of spare latex cuffs and spare O-ring. [View](#) online product page.

For use with	Cat. #	S/Each
BACTRONEZ	<b>3901-01</b>	<b>464.00</b>
BACTRON300, 600, 900	<b>3900-93</b>	<b>527.00</b>



**H**



## Series 300 STAINLESS STEEL GLOVE BOX

- Provides a clean, controlled environment for manufacturing processes in semiconductor, pharmaceutical, and other industries
- Transparent dissipative PVC window affords full view of processing area
- Side flanges simplify insertion/removal of process equipment and allow easy addition of ovens and air locks
- Select single model (with two glove ports) or twin model (with four glove ports)

**Options:** RH control system, dual purge, stainless steel airlock, vacuum nitrogen pump, pass-through vacuum or nitrogen oven

Terra's Series 300 Stainless Steel Controlled Atmosphere Chamber provides a hermetically sealed environment for such manufacturing operations as resistance welding of semiconductor hybrids, parts degassing, temperature and humidity testing, and chemical mixing in a nonreactive environment.

[View](#) online product page.

**Cleanroom Chair**  
No 1012-41  
\$477.00

Series 300 Glove Boxes*						Corresponding Air Locks**		
Model	Glove Ports	120VAC		220VAC		Right Side		Left Side
		Cat. #	S/Each	Cat. #	S/Each	Cat. #	Cat. #	S/Each
Single	2	1694-01C	6,238.00	1694-01C-220	6,238.00	1702-10C	1702-11C	3,366.00
Twin	4	1694-02C	9,594.00	1694-02C-220	9,594.00	1702-10C	1702-11C	3,366.00

\* 304 stainless steel with static-dissipative PVC viewing window installed with gasketed seals to ensure minimum vapor loss  
 \*\* Airlocks compatible with single and twin models



## Series 400 STAINLESS STEEL GLOVE BOX

- Roomy 304 stainless steel chamber provides ample space for large processing equipment
- Optional gas purge controls automatically maintain a humidity set point down to 0% RH/0.5 ppm(v) H<sub>2</sub>O

In addition to all of the features of the Series 300 models, Terra designed these chambers to also accommodate Terra's Vacuum Antechamber, which supports vacuums down to 29.9" Hg for a wide range of operations in many industries. Their double-gasketed side flange allows easy insertion of large process equipment into the work chamber and easy mounting of the antechamber, a vacuum/nitrogen oven, or a standard air lock.

[View](#) online product page.

Model shown: Single Chamber (Cat. No. 1694-13) with Dual Purge System, and Air Lock

Series 400 Chambers (304 Stainless Steel)					Air Lock	
Model	Glove Ports	Cat. #	S/Each	Installed	Cat. #	S/Each
				Right Mount		
Single	2	1694-13B	10,151.00	Right Mount	1698-01C	3,193.00
Twin	4	1694-14B	15,661.00	Left Mount	1698-02C	3,193.00

## Series 100

# PLASTIC GLOVE BOX ISOLATORS

- An economical controlled processing environment for a wide range of manufacturing and testing operations
- Dual-gasketed side doors and a fully gasketed back permit introduction of small and large equipment
- Optional gas purge controls automatically
  - ✓ establish a particle-free environment
  - ✓ maintain a humidity set-point down to 0% RH
  - ✓ minimize system recovery time
- 10"-diameter glove ports accept a wide variety of gloves, including Terra's accordion sleeve and glove assembly
- Available in five materials: acrylic, static-dissipative PVC, non-dissipative PVC, polypropylene and polycarbonate

[View](#) Terra's Series 100 isolator online.



Type	Series 100 Plastic Glove Boxes*											
See Dimensions Above	Acrylic****		Static Dissipative PVC**		Nondissipative PVC		Polypropylene*** (Dissipative PVC viewing window)		Polycarbonate		Stainless Steel Work Surface (prevents scratching)	
	Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each
Single Models (2 glove ports)	1689-00G	2,065.00	3305-00F	3,010.00	3305-03F	2,443.00	1681-29F	2,483.00	1681-31F	3,125.00	1689-11	402.00
Twin Models (4 glove ports)	1689-16G	2,775.00	3305-10F	4,561.00	3305-11F	3,377.00	1681-30F	3,614.00	1681-32F	4,799.00	1681-33	563.00

\* Complete with inlet and outlet for gas fittings and relief/bleed valve (order separately).

\*\* Includes grounding terminals. The Stainless Steel Work Surface is required with the Static-Dissipative PVC glove box to prevent scratching.

\*\*\* Includes 110VAC, 50/60Hz fluorescent illuminator (for 220VAC/50Hz, add "-220" to the part number).

\*\*\*\* Acrylic is damaged by alcohol and other cleaning agents.

## GLOVE BOX FILTRATION MODULE

- Easily configurable closed- or open-loop system provides isolation for product protection, or containment for environmental protection
- Inlet and outlet ULPA filters provide 99.999% efficient filtration of particles 0.128µm and larger to ensure an ultra-clean processing environment for particle-sensitive materials
- Ideal for removing fine pharmaceutical powders, aerosols and most microbial contaminants
- Continuously scrubs the process gas environment to remove micro-contaminants, aerosols, particulates, germs and mold spores
- Adjustable air speed via tamper-resistant settings on the variable-speed motor

[View](#) Terra's Glove Box Filtration Module online.

### Specifications

Dimensions: 2"-diameter PVC pipe

Filter: ULPA filter rated 99.999% effective @ 0.12µm particles

Motor: Brushless DC, variable speed

### Glove Box Filtration Module

Includes mounting on specified Terra glove box. Specify filters separately

	Cat. #	\$/Each
120VAC, 60 Hz	3306-71	2,547.00
240VAC, 60Hz	3306-71-220	2,547.00
ULPA Filter	1685-81	270.00





33 cu. ft.

25 cu. ft.

## Freeze and Thaw Environmental Chambers

Models provide accurate control of a wide range of thermal conditions. The automatic programmable cycling between setpoints enables continuous environmental simulation for rapid testing. The controller performs 4 programs, 40 steps, an infinite number of loops and a ramp based on any time or rate. [View](#) online product page for dimensions and more product details.

- Material: Cold Rolled Steel, Powder Coated (Exterior); Type 304, 2B Finish, Solid Stainless Steel (Interior)
- Temperature Range: -25°C to 70°C
- Temperature Control/Uniformity at 20°C: ±0.1°C/±0.3°C
- Humidity Range/Control: 20 to 98%/±3% RH
- Application: Pharma drug research, concrete and asphalt testing, coating and adhesive testing, outdoor weathering tests, stress testing

Model	Shelves Included/Max.	Capacity cu. ft.	208/230 V, 60 hz	
			Cat. #	\$/Each
Humidified*	4/25	25	<b>5757-32</b>	<b>17,497.00</b>
Standard	4/25	25	<b>5757-33</b>	<b>14,650.00</b>
Humidified*	5/31	33	<b>5757-34</b>	<b>18,953.00</b>
Standard	5/31	33	<b>5757-35</b>	<b>16,041.00</b>

\* Humidified models feature gVapor energy efficient delivery of controlled humidity vapor (as needed)

## Insect Growth Chambers

Designed for insect rearing in various fields and disciplines, these energy efficient units come standard with corrosion-resistant phenolic coated coils that protect interior components and contribute to unit longevity. [View](#) online product page for dimensions and details.

- Temperature range/control: 5°C to 70°C/ ±0.1°C
- Temperature uniformity/sensor: ±0.3°C/ 3-wire RTD
- Humidity range/control: 20% to 98%/ ±2% RH
- gVapor™ delivers controlled humidity vapor as needed
- gROD™ for energy savings; high R, CFC-free foam insulation
- gLux™ Fluorescent Lighting System simulates day/night conditions
- Includes adjustable, perforated stainless steel shelves
- Application: Insect growth studies in various fields and disciplines

Model	Shelves Included/Max	Capacity cu. ft.	115 V, 60 hz	
			Cat. #	\$/Each
Benchtop*	3/15	10	<b>5757-26</b>	<b>12,237.00</b>
Floor Model**	4/25	25	<b>5757-27</b>	<b>13,879.00</b>
Floor Model**	5/31	33	<b>5757-28</b>	<b>15,454.00</b>

\*1 access port

\*\*2 access ports



**5757-28**  
Transportable,  
30% more space w/  
heavy-duty casters

**5757-27**  
Transportable w/  
heavy-duty casters

**5757-26**  
Stackable w/ leveling  
feet

## Photostability Chambers

Specifically designed for operation near UV- and visual-light testing with fluorescent lamps, these benchtop units provide uniform light distribution and high-intensity levels for quick response to forced degradation and confirmatory processes. [View](#) online product page for details.

- Dimensions: 37.6"W x 30.2"D x 46"H, with leveling feet.
- Shelf area dimensions: 19 x 23/Shelf capacity: 22 lbs. max
- Capacity: 10.5 cu. ft.; Lamp type: UVA and VIS
- Material: Stainless Steel/Reflective specular aluminum
- Features manual and automatic mode, programmable alarms
- Includes two access ports; two sliding shelves
- Application: Forced degradation studies and confirmatory studies in agriculture, pharmaceutical and biological industries

Model	Time Req. to reach ICH 200 Rec.: W-hr/m2 Rec.: 1.2 million lux-hr	115V, 60hz	
		Cat. #	\$/Each
Standard	10 hrs.	<b>5757-42</b>	<b>24,637.00</b>
	60 hrs.		
Humidified*	8 hrs.	<b>5757-43</b>	<b>26,205.00</b>
	35 hrs.		

\* Isolates effects of hydration during photostability testing






### Heated and Humidified Incubators by Caron

These energy-efficient benchtop and floor-standing models provide consistent and precise controlled conditions in research processes. [View](#) online product page for ordering details.

- Material: Stainless steel
- Temperature range/control: 10°C above ambient to 70°C/ ±0.1°C
- Temperature uniformity: ±0.3°C/
- **gVapor™** delivers controlled humidity vapor as needed
- **gROD™** for energy savings; high R, CFC-free foam insulation
- **gLux™** Fluorescent Lighting System simulates day/night conditions
- Application: General laboratory research, life science

Model	Shelves Included/Max	Capacity cu. ft.	115 V, 60 hz	
			Cat. #	S/Each
Heated	3/15	10	<b>5757-36</b>	<b>7,887.00</b>
Humidified*	3/15	10	<b>5757-37</b>	<b>10,071.00</b>
Heated	4/25	25	<b>5757-38</b>	<b>8,727.00</b>
Humidified*	4/25	25	<b>5757-39</b>	<b>10,799.00</b>
Heated	5/31	33	<b>5757-40</b>	<b>10,071.00</b>
Humidified*	5/31	33	<b>5757-41</b>	<b>12,255.00</b>

\* Humidified models feature gVapor energy efficient delivery of controlled humidity vapor (as needed)

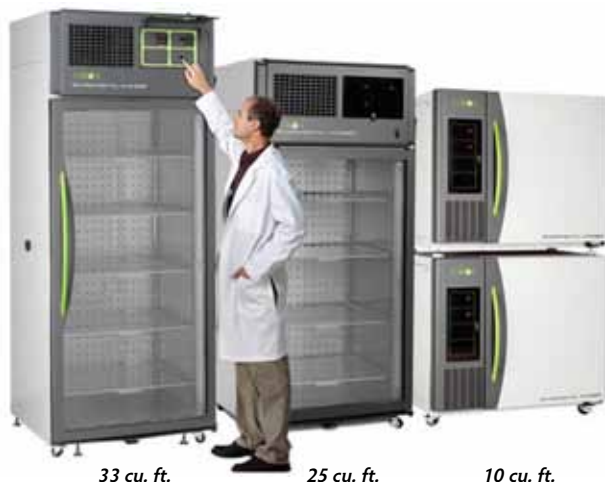

33 cu. ft.

25 cu. ft.

10 cu. ft.

### Midi™ 40 Small Capacity CO<sub>2</sub> Incubator by Thermo Scientific

These compact and stackable units feature a comprehensive advanced microprocessor system for safe and efficient operation. Designed for cell culture scientists, these models deliver what bigger incubators do at a cost-effective price point and in a space-saving footprint. [View](#) online product page for 230V models.

- Exterior Dimension: 18.5"W x 23.5"D x 18"H
- Interior Dimension: 12.2"W x 14"D x 14"H
- Material: stainless steel
- Advanced IntrlLogic™ II microprocessor
- Factory calibration maintains accurate thermal gas performance
- Comprehensive alarm system
- Temperature range: 5°C above ambient to 60°C
- Temperature control ±0.1°C
- Includes: four stainless steel removable shelves
- Application: cell culture

Capacity	Temp. Range	CO <sub>2</sub> Concentration Range	Cat. #	S/Each
1.4 cu. ft.	5° to 60°C	0 to 20%	<b>3615-78</b>	<b>4,414.00</b>



Stores up to 35 T75 culture flasks

### myTemp™ Mini Digital Incubators by Benchmark Scientific

Easy to use and compact, these transportable digital incubators immediately begin to heat once desired temperature is set. The LED display shows the chamber temperature in real time. [View](#) online product page.

- Exterior Dimensions: 13.2"W x 14.5"D x 18.7"H
- Interior Dimensions: 10.3"W x 9.3"D x 12.8"H
- Digital temperature control and large LED display
- Accepts bottles and flasks up to 2 L
- Transparent door
- Convenient carrying handle
- Includes two adjustable removable shelves

Universal Voltage with US plug			
myTemp	Temperature	Cat. #	S/Each
Heat Only	Ambient +1°C to 60°C	<b>BR18-00</b>	<b>390.00</b>
Heat and Cool	Ambient -15°C to 60°C	<b>BR18-01</b>	<b>548.00</b>





**Heratherm™ General, Advanced Protocol and Advanced Security Protocol Ovens**

by *Thermo Scientific*

Gravity and mechanical convection modes in benchtop or floor standing models are available in a wide range of sizes. **Mechanical convection** models provide fast sample drying and heating, superior temperature uniformity and quick temperature recovery. Gravity convection models provide gentle drying and heating with low air turbulences.

[View](#) the online product page for complete details

- Stackable with adjustable shelves
- Rounded inside corners for easy cleaning
- Microprocessor control
- Automatic overtemperature alarm
- Easy calibration routine
- RS232 interface

**A. General Protocol Ovens**

*Routine heating and drying up to 250°C*

- Material: Stainless steel
- Manually controlled fresh air damper
- On/Off timer functions

**B. Advanced Protocol Ovens**

*Accurate and heating up to 330°C*

- Adjustable fan speed: 2-5
- Electronically controlled fresh air damper
- Flexible timer functions; programmable features
- Access port for data monitoring

**C. Advanced Protocol Security Ovens**

*Safety features protects samples*

- Adjustable fan speed: 5
- Undertemperature alarm, door alarm, lockable door, connection for optional sample temperature sensor
- Optional stainless steel exterior

	Type	Range	Cat. #	\$/Each
A	Gravity, 120 V, 66 L	50° to 250°C	<b>3700-87</b>	<b>1,585.00</b>
	Mechanical, 120 V, 66 L		<b>3700-90</b>	<b>1,849.00</b>
B	Gravity, 120 V, 61 L	50° to 330°C	<b>3700-93</b>	<b>2,025.00</b>
	Mechanical, 120 V, 61 L		<b>3700-96</b>	<b>2,467.00</b>
C	Gravity, 120 V, 61 L	50° to 330°C	<b>3616-40</b>	<b>2,114.00</b>
	Mechanical, 120 V, 61 L		<b>3696-49</b>	<b>2,658.00</b>



**Large Capacity Forced-Air Multi-Purpose Ovens by Shel Lab**

Ideal for glassware drying and high volume sample and production processes, these ovens have excellent temperature uniformity and fast recovery. [View](#) online product page for dimensions.

- Temperature Range: Ambient +15°C to 260°C
- Material: Stainless steel interior
- Includes stainless steel shelves
- Exhaust port, digital timer, independent overtemperature safety, wrap-around insurable, high-temperature silicone door seal

Capacity, 240 V	Cat. #	\$/Each
14 cu ft./three shelves	<b>3700-85</b>	<b>3,494.00</b>
28 cu ft./six shelves	<b>3700-86</b>	<b>4,920.00</b>



**Class 100 Cleanroom Ovens by Thermo Scientific**

Used for cleanroom, semiconductor and electronics applications, these units provide excellent temperature control and uniform heating. [View](#) online product page for specs.

- Repeatable temperature settings from ambient +5° to 250°C
- Material: Stainless steel interior
- Non-filtered models meet Class 100 requirements; HEPA-filtered models exceed Class 100 conditions
- Four program controller with 16 segments

Capacity	240 V	Cat. #	\$/Each
14 cu ft./three shelves	With HEPA Filter	<b>3700-70</b>	<b>9,596.00</b>
	w/out HEPA Filter	<b>3700-15</b>	<b>7,649.00</b>



**Vacuum Ovens by Thermo Scientific**

Designed for desiccating, vacuum embedding, plating and electronic component processing applications, these models are available with two control and display options. [View](#) online product page for specs.

- Temperature Range: Ambient +10° to 220°C
- Material: Stainless steel interior
- Independent vacuum and purge needle valves; radiant warm-wall heating

Capacity	120 V	Cat. #	\$/Each
14 cu ft./three shelves	Dial Thermometer	<b>3700-35</b>	<b>2,803.00</b>
	LED Readout	<b>3700-80</b>	<b>2,878.00</b>

**Lindberg/Blue M™ 1700°C Box Furnaces, Integral Control**

Designed for high-temperature operation with minimal maintenance, these energy-efficient models are available in three controller modes. Units are ideal for composite research, precious- and exotic-metals treatment, high-temperature ceramic research and powder metallurgy.

**Features:**

- Fast heat-up and increased resistance to thermal shock with Moldatherm™ high-temperature ceramic fiber insulation
- Molybdenum disilicide elements reduce maintenance
- Side swing door for full and easy access to chamber
- Solid-state power module with ammeter, circuit breaker, transformer and front panel indicator lights

**Digital Single Setpoint** models have a microprocessor-based PID control with a single segment and setpoint and one ramp to setpoint. This mode also features an adjustable high limit over-temperature protection and LED display that shows actual temperature vs. setpoint.

**Digital Multisegment/Multiprogram** models have a microprocessor based PID control with up to 30 programs and up to 300 segments for ramp and dwell temperature control and up to 99 segments per program. The digital LED display shows actual temperature vs. setpoint in °C or °F Digital Single-Setpoint Controller

**Digital Multisegment/Multiprogram/Communications** models allow connection to a remote computer via an RS-485 data port to enable modification, interrogation and data transfer of instrument control and configuration parameters.

Optional: **Over-temperature Protection (OTP)** operates via signal from an independent thermocouple. The OTP protects unit and load in event of control circuit failure by overriding main controller and shutting off power if high limit is reached.

[View](#) online product page for details.



Capacity	Interior Dimensions	Controller	Cat. #	S/Each
17 L	11"W x 10.5"D x 9"H	Digital/1 setpoint	<b>1617-22</b>	<b>20,127.00</b>
17 L	11"W x 10.5"D x 9"H	Multisegment/multiprogram	<b>1617-24</b>	<b>21,018.00</b>
17 L	11"W x 10.5"D x 9"H	Multisegment/multiprogram/communications	<b>1617-26</b>	<b>25,175.00</b>
25.5 L	11"W x 15.5"D x 9"H	Digital/1 setpoint	<b>1617-28</b>	<b>23,624.00</b>
25.5 L	11"W x 15.5"D x 9"H	Multisegment/multiprogram	<b>1617-30</b>	<b>28,475.00</b>
25.5 L	11"W x 15.5"D x 9"H	Multisegment/multiprogram/communications	<b>1617-32</b>	<b>28,475.00</b>



**Lindberg/Blue M Moldatherm™ Box Furnaces—100° to 1100°C**

Available in two controller modes, these double-walled furnace models minimize exterior temperature. [View](#) online page for additional capacities and specs.

- Self-tuning feature ideal for thermal process
- Digital OTP: single segment, single setpoint, one ramp setpoint

120V	Cat. #	S/Each
Digital OTP 1.99 L	<b>1722-10</b>	<b>2,196.00</b>
Mult. Seg/1 Prog/OTP, 5.3 L	<b>1722-16</b>	<b>2,899.00</b>



**Thermolyne™ Benchtop Muffle Furnaces—100°C to 1200°C**

Ideal for general lab use in processes such as gravimetric analysis, sintering, quantitative analysis and heat treating, these energy-efficient models are available in 2 L and 5.9 L capacities. [View](#) online page to see additional capacities.

- Open-coil heating on both sides of chamber
- Door safety switch; Includes power cord
- Free-floating door prevents heat loss
- Thermocouple break protection

120 V, 2 L Capacity	Cat. #	S/Each
Single Set Point Control	<b>1800-52</b>	<b>2,379.00</b>
Prog. 4 Ramp & 4 Dwell	<b>1800-54</b>	<b>2,993.00</b>



**Thermolyne Largest Tabletop Muffle Furnaces—100° to 1093°C**

Designed to maximize space, these models are available in two temperature modes ideal for annealing glass, determination of volatiles, catalyst research and ashing samples. [View](#) online product page.

- CSA and CE approved (select models)
- Includes two refractory shelves
- 35A circuit breaker protect critical components and heating elements

240 V, 45 L Capacity	Cat. #	S/Each
Digital Single Setpoint	<b>4003-01</b>	<b>6,994.00</b>
Digital Programmable	<b>4003-04</b>	<b>7,846.00</b>



No. 1536-14



No. 1536-13



No. 1536-25



No. 1620-39

**A. CxF Series -40°C and -86°C Chest Freezers by Revco**

The CxF Series Chest Freezers are designed to provide versatile and reliable sample storage. An intuitive microprocessor control panel allows personnel to see set points, system status and alarm messages. A variety of sizes and temperature ranges are available to accommodate most application requirements. [View](#) online product page.

**B. UxF Series -86°C Upright Freezers by Revco**

The UxF Series freezers provide outstanding sample protection, while maintaining the highest standards in performance, energy efficiency and capacity per footprint. A dual-cascade system provides faster recovery after door openings, tighter uniformity, and reduces energy use. A variety of sizes and temperature ranges are available to accommodate most application requirements. [View](#) online product page.

**C. Revco Pharmacy Refrigerators by Thermo Scientific**

These high-performance pharmacy refrigerators provide stable temperature control over a range of +1°C to +8°C. Easily configured for accurate storage and retrieval of pharmacy products, these units also have full extension stainless steel roll-out drawers, safety glass, double-panel doors and a bright digital temperature display that simplifies operation. [View](#) online product page.

	Type	Cryo Box Cap.*	Exterior Dimensions H" x W" x D"	Temp Range (°C)	Capacity (cu. ft.)	Power**	Cat. #	\$/Each
A	CxF Ultra Low	63	28.5 x 29.9 x 43.8	-10° to -40°	3	115V	<b>1536-10</b>	<b>5,319.00</b>
	CxF Ultra Low	252	72 x 33.4 x 40.5	-10° to -40°	12.7	115V	<b>1536-11</b>	<b>6,523.00</b>
	CxF Ultra Low	348	87.6 x 33.8 x 40.5	-10° to -40°	17	115V	<b>1536-12</b>	<b>7,442.00</b>
	CxF Ultra Low	396	96 x 33.4 x 40.5	-10° to -40°	20	115V	<b>1536-13</b>	<b>7,539.00</b>
	CxF Ultra Low	63	28.5 x 29.9 x 43.8	-50° to -86°	3	115V	<b>1536-14</b>	<b>7,799.00</b>
	CxF Ultra Low	252	72 x 33.4 x 40.5	-50° to -86°	12.7	115V	<b>1536-15</b>	<b>9,748.00</b>
	CxF Ultra Low	348	87.6 x 33.8 x 40.5	-50° to -86°	17	115V	<b>1536-16</b>	<b>10,480.00</b>
	CxF Ultra Low	396	96 x 33.4 x 40.5	-50° to -86°	20	115V	<b>1536-17</b>	<b>12,267.00</b>
B	UxF Ultra Low	300	17.78 x 28.29 x 51.23	-50° to -86°	14.9	115V	<b>1536-24</b>	<b>10,715.00</b>
	UxF Ultra Low	400	23.13 x 28.29 x 51.23	-50° to -86°	19.4	115V	<b>1536-25</b>	<b>12,114.00</b>
	UxF Ultra Low	500	28.75 x 28.29 x 51.23	-50° to -86°	19.4	115V	<b>1536-26</b>	<b>13,045.00</b>
	UxF Ultra Low	600	34.38 x 28.29 x 51.23	-50° to -86°	19.4	115V	<b>1536-27</b>	<b>13,977.00</b>
	UxF Ultra Low	700	40.0 x 28.29 x 51.23	-50° to -86°	19.4	115V	<b>1536-28</b>	<b>14,832.00</b>
	<b>No. of Drawers</b>							
C	Pharmacy Refrigerator	5	24 x 29.5 x 73.6	1° to 8°C	11.5	115V	<b>1620-27</b>	<b>3,974.00</b>
	Pharmacy Refrigerator	6	28 x 36.4 x 79.2	1° to 8°C	23.3	115V	<b>1620-31</b>	<b>5,969.00</b>
	Pharmacy Refrigerator	6	34 x 36.4 x 79.2	1° to 8°C	29.2	115V	<b>1620-35</b>	<b>6,860.00</b>
	Pharmacy Refrigerator	12	56.5 x 36.4 x 79.2	1° to 8°C	51.1	115V	<b>1620-39</b>	<b>7,961.00</b>

\* Using 2" Box Rack. \*\* Other voltages available.



**Jewett™ Pass-Through Refrigerators**

Provides convenient multiple-point access for cold storage of non-critical materials in life science, clinical and industrial applications. UL and CE listed units keep uniform temperature and rapid recovery. Temperature range: 2° to 4°C. Models below are 120VAC; 220VAC available. Shown: 3515-09. [View](#) online product page.

No. of Doors	No. of Shelves	Capacity	Cat. #	\$/Each
2	5	24.8 cu. ft.	<b>3615-09</b>	<b>6,488.00</b>
4	10	55 cu. ft.	<b>3615-11</b>	<b>9,398.00</b>



**General Lab Refrigerators/Freezers**

Choose among undercounter (UC on chart below) and upright lab refrigerators, freezers, or refrigerator/freezers. Temperature range: 1° to 12°C (refrigerators), -12° to -20°C (freezers). Models below are 120VAC; 220VAC available. Shown: 1720-49B. [View](#) online product page.

Model	Capacity	Cat. #	\$/Each
UC Ref.	5.6 cu. ft.	<b>1720-43</b>	<b>1,535.00</b>
UC Ref./Freezer	5.6 cu. ft.	<b>1720-47</b>	<b>1,560.00</b>
Upright Ref./Freez.	18.2 cu. ft.	<b>1720-49B</b>	<b>2,416.00</b>
UC Freezer	5.6 cu. ft.	<b>1720-54</b>	<b>1,281.00</b>
Upright Freezer	20 cu. ft.	<b>1720-60</b>	<b>1,817.00</b>



**Flammable Material Refrigerators/Freezers**

Protects against explosions emanating from stored flammable materials at below-ambient temperatures or vapors in the surrounding area. Suitable for Class 1, Group C and D environments. Temperature range: 1° to 12°C (refrigerators), -12° to -20°C (freezers). Models below are 110VAC (220V available); shown: 1720-20. [View](#) online product page.

Model	Capacity	Cat. #	\$/Each
Lab Ref./Freezer	10.1 cu. ft.	<b>1720-20</b>	<b>3,109.00</b>
Undercounter Freez.	5.6 cu. ft.	<b>1720-25</b>	<b>3,097.00</b>
Upright Refrigerator	21 cu. ft.	<b>1720-41</b>	<b>6,825.00</b>
Upright Freezer	20 cu. ft.	<b>1720-27</b>	<b>3,497.00</b>

REFRIGERATORS and FREEZERS from Marvel Scientific



**ADA-Compliant Refrigerator**

Fits under 34" countertops and casework. Complies with American with Disabilities Act (ADA) for accessibility. UL and C-UL listed. Temperature range: 1° to 7°C. Model below is 120VAC; 220VAC available. Capacity: 5.4 cu. ft. Ext. dimensions: 23.875"W x 24.375"D x 31.5"H. Includes one stationary shelf and two pull-out selves. [View](#) online product page.

Cat. #	\$/Each
<b>2860-06A</b>	<b>961.00</b>



**Two-Drawer Undercounter Refrigerators**

UL-listed for commercial lab use, these units feature extra-deep pull-out drawers for easy access to full storage area. Hidden touchpad controls include LED digital display. Temperature range: 0° to 7°C. Capacity: 5.6 cu. ft. Ext. dim.: 23.875"W x 24.25"D x 34"H. Models below are 120VAC. [View](#) online product page.

Drawer Finish	Cat. #	\$/Each
White powder-coat steel	<b>2860-07A</b>	<b>1,539.00</b>
Stainless steel	<b>2860-08A</b>	<b>1,628.00</b>



**Hazardous Location Refrigerators**

UL-listed for Class 1, Group C and D applications; complies with NEC code for Class 1, Division 1 and 2 hazardous locations. Features two adjustable wire shelves and adjustable microprocessor thermostat. Temperature range: 1° to 7°C. Model below is 110VAC. Capacity: 6.1 cu. ft. Ext. dim.: 23.875"W x 26"D x 34"H. [View](#) online product page.

Cat. #	\$/Each
<b>2860-04</b>	<b>1,686.00</b>

# STAINLESS STEEL LAB and CLEANROOM TABLES



*Optional shelf, drawer, keyboard tray and monitor arms*

Designed for modular use, these easy to assemble stainless steel tables allow users to add and/or change components as need arises. The smooth surface and rounded corners allow easy cleaning and the tapered sleeve design and the double-sided tape are ideal for affixing various top materials.

- Load rated at 50 lbs. per sq. foot and up to 600 lbs. maximum
- All-stainless steel shelves and high-temperature casters allow cart wash and enable autoclave applications
- Casters and accessories sold separately

## A. Stainless Steel Lab Table

### A. Stainless Steel Lab Tables and 3-Sided Frame

Dimensions L" x W" x H"	Weight lbs.	Cat. #	S/Each
29.75 x 30 x 35.375*	58	1533-82	924.00
35.75 x 30 x 35.375	70	1533-83	975.00
47.75 x 30 x 35.375	91	1533-84	1,099.00
59.75 x 30 x 35.375	119	1533-85	1,112.00

\*Tray and drawer are not available for #1533-82



*Three-sided frame with backsplash and optional wire shelf*

*With backsplash and shelf*

## B/C. Stainless Steel Tables with Backsplash

Models are equipped with a backsplash to protect on-top instruments, equipment and testing items.

### B. Stainless Steel Lab Tables and 3-Sided Frame

Dimensions L" x W" x H"	Cat. #	S/Each
29.75 x 30 x 35.188*	1533-70	924.00
35.75 x 30 x 35.188	1533-71	1,027.00
47.75 x 30 x 35.188	1533-72	1,044.00
59.75 x 30 x 35.188	1533-73	1,112.00

\*Tray and drawer are not available for #1533-70 and #1533-66

### C. Stainless Steel Worktable with Backsplash and Shelf

Dimensions L" x W" x H"	Cat. #	S/Each
29.75 x 30 x 39.5*	1533-66	781.00
35.75 x 30 x 39.5	1533-67	816.00
47.75 x 30 x 39.5	1533-68	860.00
59.75 x 30 x 39.5	1533-69	895.00

\*Tray and drawer are not available for #1533-70 and #1533-66

[View](#) all cleanroom and laboratory tables online.

D. – F. Designed for ISO 7 or Class 10,000 cleanliness, these cleanroom or lab tables have a seamless 304 stainless steel work surface supported by 11-gauge nickel/chrome-plated channel supports.



*Stainless Steel Bottom Shelf*



*Stainless Steel Bottom 3-sided Frame*



*Stainless Steel Bottom H-Frame*

## Cleanroom/Lab Tables

Type	Length inches	Post Material	Width 30 Inches		Width 36 Inches		Width 44 Inches	
			Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each
D	60	SS	1305-00	956.00	1305-18	1,098.00	1305-54	1,238.00
	72	SS	1305-01	1,033.00	1305-19	1,178.00	1305-55	1,321.00
	96	SS	1305-02	1,261.00	1305-20	1,418.00	1305-56	1,569.00
E	60	SS	1305-06	792.00	1305-24	924.00	1305-60	1,060.00
	72	SS	1305-07	863.00	1305-25	1,039.00	1305-61	1,136.00
	96	SS	1305-08	1,029.00	1305-26	1,217.00	1305-62	1,318.00
F	60	SS	1305-12	792.00	1305-30	959.00	1305-66	1,060.00
	72	SS	1305-13	863.00	1305-31	1,039.00	1305-67	1,136.00
	96	SS	1305-14	1,029.00	1305-32	1,217.00	1305-68	1,318.00



Stainless steel clipboard—see page 38

Stainless steel C-Base bench (No. 1521-55) and optional drawer unit



Items in blue



Static-dissipative C-Base Bench No. 1521-32, with No. 1524-50 uprights, 1700-76 light, 1700-90 shelf and 1740-07 drawer.

### Stainless Steel Tops

- Stainless steel work surface meets Class 100 particle requirements
- Choice of adjustable "A" base or nonadjustable "C" base available in either finished steel or stainless steel
- Ground terminals and wrist-strap pin connectors allow easy grounding of ionizing guns, wrist straps, and other static protection equipment

### Laminate Tops

- Sealed laminate top design meets Class 100 particle requirements
- Static-dissipative laminate safely dissipates charges to reduce possibility of electro-static discharge (meets MIL-B-81705-B)
- Optional modular overhead fluorescent light fixture provides shadow-free viewing anywhere on benchtop surface

Benchtop Dimens. (W" x D")	304 Stainless Steel Top w/ Finished Steel Base*						Laminate Tops					
	Solid Top			Perforated Top (.75" ID Hole)**			Nonconductive Tops			Static Dissipative Tops		
	"A" Base Design (telescoping legs)	"C" Base Design (recessed legs)	S/Each	"A" Base Design (telescoping legs)	"C" Base Design (recessed legs)	S/Each	"A" Base Design (telescoping legs)	"C" Base Design (recessed legs)	S/Each	"A" Base Design (telescoping legs)	"C" Base Design (recessed legs)	S/Each
48 x 30	1521-45	1521-54	1,235.00	1522-56	1522-66	1,538.00	1722-00	1521-09	735.00	1728-00	1521-31	1,069.00
60 x 30	1751-00	1521-55	1,324.00	1522-57	1522-67	1,647.00	1724-00	1000-00	816.00	1730-00	1521-32	1,092.00
72 x 30	1752-00	1521-56	1,383.00	1522-58	1522-68	1,867.00	1726-00	1000-01	806.00	1732-00	1521-33	1,135.00
84 x 30	1521-46	1521-57	1,437.00	1522-59	1522-69	2,050.00	1521-01	1000-02	978.00	1521-23	1521-34	1,135.00
96 x 30	1753-00	1521-58	1,569.00	1522-60	1522-70	2,307.00	2402-00	1000-03	1,033.00	2400-00	1521-35	1,389.00
48 x 34	1521-49	1521-61	1,325.00	1522-61	1522-71	1,546.00	1723-00	1521-16	780.00	1700-29	1521-38	1,103.00
60 x 34	1700-65	1521-62	1,420.00	1522-62	1522-72	1,807.00	1725-00	1521-17	809.00	1731-00	1521-39	1,130.00
72 x 34	1700-66	1521-63	1,462.00	1522-63	1522-73	1,962.00	1727-00	1521-18	853.00	1733-00	1521-40	1,185.00
84 x 34	1521-50	1521-64	1,534.00	1522-64	1522-74	2,260.00	1521-05	1521-19	923.00	1521-27	1521-41	1,269.00
96 x 34	1521-51	1521-65	1,682.00	1522-65	1522-75	2,629.00	1521-06	1521-20	1,069.00	1521-28	1521-42	1,433.00

\* Stainless Steel Scuff Guards included on finished C-Base benches; order separately for A-Bases. Nonadjustable (one piece) legs also available with "A" Base design at no additional cost (specify when ordering). Finish is white powder coat.

\*\* For .25" diameter perforations, add \$32/ft. of width to the standard pricing.

[View](#) more Cleanroom Work Stations.



One size fits all!

### ErgoHeight™ Work Stations

- Eliminates back stress and injury, enhances productivity
- Provides up to four programmable height settings
- Smooth bench motion—suitable for microscopes and delicate process equipment

Benchtop Dimensions (W" x D")	Nonconductive Top		Stainless Steel Top	
	Cat. #	S/Each	Cat. #	S/Each
48 x 30	3504-17	2,864.00	3504-05	3,331.00
60 x 30	3504-18	3,065.00	3504-06	3,504.00
72 x 30	3504-19	3,186.00	3504-07	3,623.00
36 x 34	3504-20	2,855.00	3504-08	3,292.00
48 x 34	3504-21	2,926.00	3504-09	3,363.00
60 x 34	3504-22	3,098.00	3504-10	3,535.00
72 x 34	3504-23	3,217.00	3504-11	3,654.00

Other sizes and materials available including stainless steel bases. [View](#) online product page.



**MetroMax i™ Polymer Shelving with Microban Antimicrobial Product Protection**

- Made with all-polymer and type 304 stainless steel with a lifetime warranty against rust and corrosion
- Mats, open and solid: mineral reinforced polypropylene. Mats contain Microban® antimicrobial
- Post cap and center beam cap: High-density polyethylene
- Continuous temperature—MetroMax i™ can be used continuously within a range of -20/120° F (-29/49° C) with intermittent exposure to 212° F (100° C) for cleaning



**MetroMax Q™ Shelving with Microban Antimicrobial Product Protection**

- Made with epoxy-coated steel frames and posts
- Polymer mats easily removed for fast cleaning
- Patented corner release unlocks shelves without tools
- Shelf frames and posts made with electroplates substrate and highly durable, abrasion-resistant epoxy finish
- Temperature range: -20°F (-29°C) to 125°F (52°C) continuous use, with intermittent exposure to 200°F (93°C) for cleaning

MetroMax i™ and MetroMax Q™ storage systems have interchangeable accessories. Units effectively organize, contain and compartmentalize stored items. Models are available with stem casters or as stand alone units.

**Sizes:**

- 18" to 24" nominal width
- 24" to 72" nominal length

**Weight Load:**

- 800 lbs. per shelf for lengths of 24" to 48"
- 600 lbs. per shelf for lengths of 54" or longer
- 2,000 lbs. maximum per stationary unit
- Interchangeable Accessories
- Easy to assemble; easy to clean with smooth surfaces
- Shelves can be adjusted at 1" increments



Available in 4- and 5-tier models with shelves and (4) posts

**Accessories**



Solid Shelf



Open Grid Shelf



All Models



Stationary Unit



Stem Caster, 900 lb. load

Call Terra at 714-578-6100 for details and pricing





**Modular, mobile and highly adaptive to the changing needs of your laboratory.**

Starsys systems are ideal units for improving space efficiency and lab productivity. Models are easy to install and can be customized to your specifications. The modular design is easily reconfigured as your laboratory operations change. The advanced polymer shell construction resists denting, chipping, rusting, flaking and corroding. The rigid aluminum coated metal substructure adds strength and durability. Choose from an array of models with flexible door, drawer and cabinet designs. ALL MODELS come with 5" polymer casters with lock plate.

**A. Triple Bay High-Profile Unit**

No. 1311-25A

**B. Single Bay High Profile Unit**

No. 1311-23A

**C. Mobile Single Bay WorkCenter**

No. 1311-27A

**D. Mobile Single Bay WorkCenter with Overhead (glass cabinet)**

No. 1311-29A (shown with custom roll-up overhead door)

**E. Mobile Double Bay WorkCenter with Overhead**

No. 1311-31A (shown with custom overhead drawer unit)



F



G



I



H



J

Custom configurations available. Call Terra Universal at 714-578-6100 for details.

[View](#) online product page.

**Starsys Mobile WorkCenters**

	Description	Dimensions W" x D" x H"	Material	Cat. #	\$/Each
A	Triple Bay High Profile Unit	62.35 x 24.9 x 78.3	Bay Three: polymer shelves with inner panel	1311-25A	5,933.00
B	Single Bay High Profile Unit	22.75 x 24.9 x 78.3	(5) adjustable polymer shelves on inner panel	1311-23A	2,273.00
C	Mobile Single Bay WorkCenter	23.6 x 28.6 x 39	Black epoxy island	1311-27A	2,130.00
D	Mobile Single Bay WorkCenter with Overhead (glass cabinet)	2.7 x 24.8 x 81.6	Black epoxy top	1311-29A	3,760.00
E	Mobile Double Bay WorkCenter with Overhead (epoxy top)	43.4 x 28.6 x 81.6	Black epoxy top with backsplash	1311-31A	5,021.00
F	Cabinet, Pull-out Desk Drawers, Overhead Cupboards	63.2 x 28.6 x 81.9	Polymer shelves with clear door	1306-83	7,192.00
G	Mobile Double Bay WorkCenter with Overhead (stainless steel top)	43.4 x 28.6 x 81.6	Black epoxy top with backsplash	1311-30A	5,361.00
H	Mobile Double Low Profile Drawer-Cabinet Combination	42.6 x 24.88 x 44.7	5" polymer casters with lock plate	1311-21A	3,038.00
I	Mobile Double Bay High Profile Cabinet	42.55 x 27.9 x 78.3	5" polymer casters with lock plate	1311-24A	3,208.00
J	Mobile WorkCenter with Center Knee Space	73.1 x 28.6 x 36	Black epoxy top	1311-26A	4,684.00



**A** *Three-Shelf Cart (No. 1532-53A)  
Microban® Antimicrobial  
Formulation Available!*



**B** *Three-Shelf Deep-Ledge Cart  
(No. 1532-57)  
Microban® Antimicrobial  
Formulation Available!*



**C** *Series 100 – Two stainless steel solid  
shelves (see chart below)*



**D** *Series 200 – Three stainless steel solid  
shelves (see chart below)*



**E** *Series 400 – Two chrome wire shelves  
and one stainless steel solid shelf.*



**F** *Series 600 – Two wire shelves,  
chrome or stainless steel.*



**G** *Series 700 – Shown with optional bin.  
Three wire shelves, in a choice of chrome  
or stainless steel.*

**A. Polymer Utility Carts  
with Adjustable Shelves**

These carts by Metro will never corrode and the ergonomic handle provides more walking space between you and the cart during transport. The trays offer twice the amount of space and the ship's edge prevents items from sliding when cart is mobile. Two-tier and three-tier models are available in blue, black and gray. Load capacity: 150-500 lbs.

2-Shelf Models W" x L"		Blue	
		Cat. #	\$/Each
18 x 28		1532-12A	151.00
21.5 x 33.75		1532-47A	163.00
27 x 39.5		1532-13A	190.00
3-Shelf Models W" x L"		Blue	
		Cat. #	\$/Each
18 x 28		1532-14A	176.00
21.5 x 33.75		1532-53A	199.00
27 x 39.5		1532-15A	232.00

**B. Polymer "Deep Ledge" Carts  
with Adjustable Shelves**

Similar to models above, but with 2.75" (70mm)-deep shelf ledges for enhanced spill containment. All models are 41"H. Color: blue.

W" x L"	Configuration	Cat. #	\$/Each
21.5 x 32.75	2-shelf	1532-56	170.00
21.5 x 32.75	3-shelf	1532-57	209.00
27 x 38.75	2-shelf	1532-58	199.00
27 x 38.75	3-shelf	1532-59	244.00

Dozens more at [TerraUniversal.com](http://TerraUniversal.com)!

[View](#) all Cleanroom and Lab Utility Carts

Ordering Information		C. Series 100		D. Series 200		E Series 400		F. Series 600		G. Series 700	
Dimensions W" x L" x H"	Caster Dia.	Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	Stainless Steel Wire Shelves		Stainless Steel Wire Shelves	
18 x 24 x 38	4"	1401-23	440.00	1401-44	589.00	1401-54	293.00	1402-39	413.00	1402-56	559.00
18 x 30 x 38	4"	1401-24	498.00	1401-45	650.00	1401-55	332.00	1402-41	471.00	1402-58	619.00
18 x 36 x 38	4"	1401-25	494.00	1401-46	650.00	1401-56	332.00	1402-43	471.00	1402-60	619.00
21 x 36 x 39	5"	1401-26	539.00	1401-47	710.00	1401-57	362.00	1402-45	527.00	1402-62	696.00
24 x 36 x 39	5"	1401-27	569.00	1401-48	755.00	1401-58	381.00	1402-47	556.00	1402-64	738.00

**Stainless Steel Cleanroom Computer Cart**

Terra Universal's Cleanroom Computer Cart lets you mobilize your computer anywhere in the cleanroom or hospital. These units provide an easy way to transport computer systems easily and eliminate the risk of contamination.

- Overall dimensions: 25.88"W x 17"D x 45"H (including casters)
- Sturdy 1" x 2" frame 304 stainless steel members support monitors up to 21"
- Includes
  - Perforated (.125" diameter) monitor platform (24" X 36")
  - Retractable keyboard tray and stainless steel bearings accommodate all standard keyboard sizes
  - CPU cradle fabricated of .5" diameter rods on one-inch centers and support towers up to 10"W x 18"D x 20"H
- Easy-to-clean electropolished 304 stainless steel surfaces meet the strictest particle standards
- Locking safety casters ensure smooth rolling
- Stainless steel casters (sold separately)
- CE Marking



Call Terra Universal at 714-578-6100 for details about customizing sizes and configurations

Cat. # 9600-19 S/Each 2,296.00



[View online product page.](#)



**VHRC Series Monitor and Keyboard**

- Height: 64.5" (adjustment range: 16")
- Slide-out keyboard mount with rest
- Left/right accessory compartments
- Integrated VHRC channel accepts all GCX channel mounting components
- Foot pedal for variable height adjustment
- Negative/positive tilt with tilt lock out
- Vertically adjustable channel
- Key locking enclosure with flip-up top
- Integrated adjustable cable management
- Base: 18" x 18" with 5" diameter casters

Cat. # 9600-77 S/Each 1,228.00



**VHRC Series Dual Monitor and Keyboard**

- The bracket attaches to a support arm (M-Series, or VHM Variable Height Arm) allowing (2) flat panel displays to be mounted side-by-side
- Height adjustment range: 16"
- Slide-out keyboard mount, padded wrist rest
- Left/right accessory compartments
- Integrated VHRC channel accepts all GCX channel mounting components
- Foot pedal for variable height adjustment
- Key locking enclosure with flip-up top and vented storage with rear opening for cables
- Negative/positive tilt with tilt lock out

Cat. # 9600-81 S/Each 1,114.00



Call Terra Universal for details about GCX products

**VHRS Workstation for Motion C5 Tablet with Docking Station**

- Power supply mount (universal holster securely mounts variety of power supply units)
- Height adjustment range: 11"
- Height from floor to keyboard tray: Min: 30.3"/ Max: 41.3
- Keyboard tray with left/right slide-out mouse trays
- Short mounting bracket with folding keyboard
- Roll stand handle
- Cable management cleat
- Utility basket (storage for cables and accessories)

Cat. # 9600-82 S/Each 656.00

# ValuLine™ WASTE RECEPTACLES



Complies with OSHA Requirements

All include removable liner

- No-spring foot pedal design for hands-free disposal
- Suitable for use in cleanroom environments
- Made with 304 non-magnetic stainless steel
- Tight-fitting gasketed lid eliminates particle outflow

- Bottom legs raise receptacles 0.75" to minimize particle accumulation
- All models comply with OSHA requirements; all models are Factory Mutual Systems (FM) approved and UL listed except #1456-00
- [View](#) online product page

ValuLine™ Waste Receptacles				Corresponding Rigid Liner		
Type	Capacity Gallons	Dimensions W" x D" x H"	Cat. #	S/Each	Cat. #	S/Each
A	3.5	11 dia. x 17	1456-00	334.00	1456-05	56.00
B	7	12 x 12 x 17	1456-01	518.00	1456-06	60.00
C	12	12 x 12 x 23	1456-02	611.00	1456-07	73.00
D	24	15 x 15 x 30	1456-03	823.00	1456-08	80.00
E	40	19 x 19 x 30	1456-04	1,058.00	1456-09	102.00

Each item comes with one rigid plastic liner; replacement liners are packaged one per carton



## Rigid Liners

Reusable plastic liners made of polypropylene or low-density polyethylene; liners treated with EPA-registered compound.

# BIOSAFE® WASTE RECEPTACLES

Advanced Features for critical cleanroom requirements!




Items in blue

Available in 304 or 316 Electropolished Stainless Steel



Polypropylene

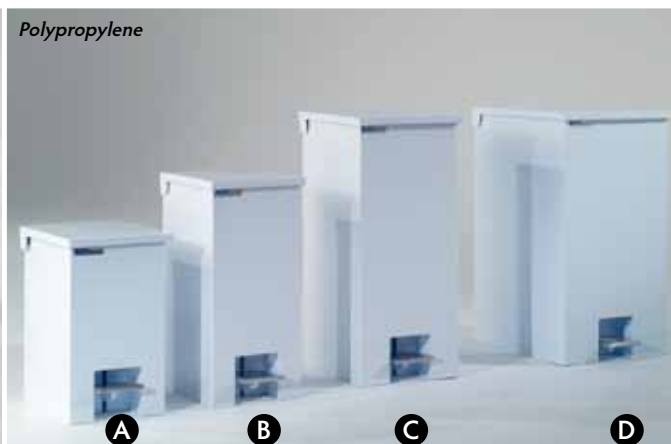

Terra's BioSafe Waste Receptacles have a soft-close quiet mechanism and an easy-open foot-pedal for hands-free dispensing. The contoured tight-fitting lid ensures safe and clean disposal. Models come with rigid, durable plastic liner for easy cleaning. Click [here](#) to view Wheeled Cleanroom Waste Receptacles with Foot Pedal and compatible accessories.

BioSafe Cleanroom Waste Receptacles								
Type	Capacity (Gallons)	Dimensions W" x D" x H"	Electropolished 304 Stainless Steel		Electropolished 316 Stainless Steel		Polypropylene	
			Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each
A	7	12 x 12 x 17	1456-16B	782.00	1456-16B-316	807.00	1456-25A	629.00
B	12	12 x 12 x 23	1456-17B	1,006.00	1456-17B-316	1,237.00	1456-26A	767.00
C	24	15 x 15 x 30	1456-18B	1,162.00	1456-18B-316	1,429.00	1456-27A	879.00
D	40	19 x 19 x 30	1456-19B	1,552.00	1456-19B-316	1,909.00	1456-28A	1,047.00

## MEDICAL WASTE CONTAINERS and BUCKETS WITH FOOT PEDALS



Rubbermaid provides a broad line of step-on containers ideal for use in hospitals, pharmacies, labs and healthcare facilities.

- Large heavy-duty pedal
- Integrated lid opens and closes slowly
- Tight-fitting, overlapping lid traps in odors and prevents spills
- Complies with OSHA regulation 29 CFR 1910.1030, FM Approved, UV stabilizer
- One-year manufacturer warranty
- [View](#) the online product page a the full list of available sizes and colors

4.5-gallon to 30-gallon capacities feature a large foot pedal for hands-free medical waste disposal.

### Medical Waste Containers & Buckets with Foot Pedals

Description	Capacity	Shape	Color	Cat. #	\$/Each
Step-On Can with Rigid Liner	4.5 gal.	Round	White	1457-06	95.00
Step-On Container	8 gal.	Square	Red	1457-09	96.00
Step-On Container	12 gal.	Square	Green	1457-16	112.00
Step-On Container	18 gal.	Square	Yellow	1457-21	127.00
Mobile Step-On Container	23 gal.	Square	Beige	1457-27	182.00
Stainless Steel Step-On Container	23 gal.	Round	Black	1457-29	333.00
30-Gallon Step-On Container	30 gal.	Round	Light Platinum	1457-31	232.00
Stainless Steel Step-On Container	30 gal.	Round	Black	1457-33	407.00

Available: Rigid Liners designed to fit Rubbermaid containers are made of one-piece plastic construction to ensure longevity and extra protection against leaks and spills.

## BRUTE® MEDICAL WASTE ROLLOUT CONTAINERS



All models feature front hinged lock and key. Units close and lock securely for easy and safe transport. Interior lock plate adds extra measure of protection.

Brute Medical Waste Rollout Containers by Rubbermaid are ideal for use in hospitals. These sturdy containers will stand up to repeated use with automated lifting equipment.

- Meets ANSI Z245.30-2008 and NSF Standard #21
- Steel catch bar and molded-in catch bar are compatible with all automated lift systems
- Remains stable in high winds and uneven surfaces with slip resistant handle, foot-tilting details and balanced lifting points
- Inset wheels won't damage walls and doorways
- Features UV stabilizer for maximum life in outdoor settings
- One-piece seamless construction for durability and easy cleaning
- One-year manufacturer warranty from date of purchase
- [View](#) online product page

### Brute Medical Waste Rollout Containers

Capacity	Dimensions W" x D" x H"	Cat. #	\$/Each
65 gal.	25.3 x 32.3 x 41.8	1457-00	260.00
95 gal.	27.3 x 35.4 x 45.6	1457-01	285.00





## Nilfisk Cleanroom Vacuum Cleaner With ULPA Filtration

A four-stage filtration system, which includes a final ULPA filter, rated 99.999% efficient @ 0.12µm particles, and quiet operation (59 dBA at 6.5 feet) make this vacuum ideal for cleanroom use. Includes filter set and tool kit with two 22" stainless steel tubes, 3" round brush, combination 12" floor nozzle, 6'6" conductive plastic hose, trolley, 30' power cord, conductive crevice nozzle and 5" utility nozzle. Tank capacity: 3.25 gallons.

	Cat. #	S/Each
120VAC	<b>1764-00</b>	<b>1,134.00</b>
240VAC	<b>1764-00-220</b>	<b>1,156.00</b>



## Minuteman® CRV Vacuum

Ideal for Class 1-100,000 facilities, this CRV features an electromagnetic/radio frequency interference filtration (RFI/EMI) for more stringent applications. The unit has a three-stage filtration system with a dual layer disposable paper bag, a non-woven cloth filter and a standard ULPA filter. The quiet motor supplies powerful suction at a constant airflow with a noise level of 65 dba. The unit comes with a stainless steel four-wheel carriage for strength and mobility. Tank capacity: 4 gallons.

	Cat. #	S/Each
115VAC	<b>1001-65</b>	<b>1,369.00</b>



## Nilfisk SS Cleanroom Vacuum with Safe-Pak


Designed for cleanroom environments down to ISO 4 (Class 10), this compact and quiet cleanroom vacuum has the Safe-Pak function that effectively contains and disposes of hazardous materials. The multi-stage HEPA filtration system removes particles down to 0.12 microns at 99.999% efficiency. Safe-Pak can be interchanged with standard vacuum collection containers. Lightweight units are constructed with pharmaceutical standard AISI 316 stainless steel. Vacuum is easy to clean with autoclavable parts. Tank capacity: 3.25 gallons.

	Cat. #	S/Each
110/120V	<b>1764-37</b>	<b>1,951.00</b>
Safe-Pak Replacement Collection Container	<b>1764-43</b>	<b>354.00</b>



## Compact, Versatile MicroVac™ — Vacuum or Clear Air Blower

- Includes 99.999% efficient ULPA filter to capture sub-micron particulates
- Four-stage filtering system
- Ideal for cleaning up hazardous powders, pharmaceutical spills
- Ventilates bio cabinets, glove boxes and other small enclosures
- Provides burst of particle-free air to clean keyboards, PCBs and other delicate surfaces
- Mini-tool kit pinpoints small surface features

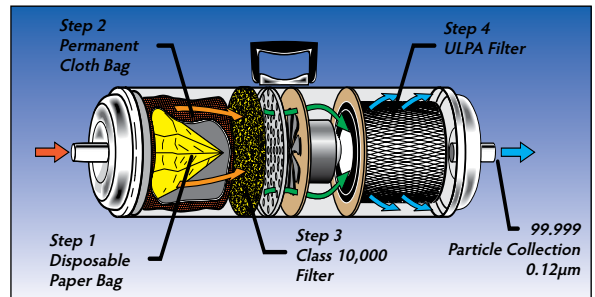

### Triple-Duty Cleaning —

- Cleans up dust and chemical spills
- Clean air blower pinpoints ULPA-filtered air
- Ventilates glove box or other enclosure

MicroVac	Cat. #	S/Each
110VAC/60Hz	<b>5100-00</b>	<b>1,161.00</b>
220VAC/50Hz	<b>5100-00-220</b>	<b>1,282.00</b>
<b>MicroVac Tool Kit</b>	<b>5100-05</b>	<b>33.00</b>
<b>Replacement Filters</b>		
Stage 1 Disposable Paper Bag	<b>5100-01</b>	<b>89.00</b>
Stage 3 Class 10,000 Filter	<b>5100-02A</b>	<b>16.00</b>
Stage 4 Class Replacement ULPA Filter	<b>5100-04</b>	<b>173.00</b>

[View all](#) Cleanroom Vacuum Cleaners.



**Vidaro Grid** — high performance cleanroom fabric designed for industries where it is essential to protect products from static dissipative charges as well as airborne particles.

**Maxima ESD** — fluid resistant fabric with built-in static control properties. Widely used in food technology, medical and pharmaceutical industries to help control product and work contamination.

**A/B. Cleanroom Coveralls and Boots** — in Vidaro Grid and Maxima ESD fabrics.

**D. Lab Coats** — Static-control fabric comes in several colors and sizes.

**C. Hoods** — Vidaro Grid style offers complete head coverage; Maxima ESD offers head coverage with round face opening.

**E/F. Frocks and Shoe Covers** — In white and light blue  
**Complete pricing and specifications at TerraUniversal.com**

View all [Reusable Cleanroom Garments](#) online.

APPAREL DISPENSERS



**Stainless Steel Wall-Mount Dispenser**

- Includes four keyhole slots for easy wall mounting
- Mounting slot covers prevent internal contamination
- Sloped top minimizes particle accumulation and simplifies cleaning
- Lift top for easy loading of packaged garments



*Key hole mounting slot cover prevents internal contamination from wall dirt.*



**Wall-Mount Garment Dispensers**

Material	Dimensions W" x D" x H" *	Cat. #	S/Each
Electropolished 304	14.25 x 10.25 x 29.75	<b>4952-30</b>	<b>495.00</b>
Stainless Steel	16 x 12.25 x 29.75	<b>4952-31</b>	<b>585.00</b>
Polypropylene	14.25 x 10.25 x 29.75	<b>4952-32</b>	<b>356.00</b>
Polypropylene	16 x 12.25 x 29.75	<b>4952-33</b>	<b>446.00</b>

\* Garment dispenser height refers to the rear measurement. Units are 1.5" (38 mm) shorter in the front due to the sloped top.

**Table-Top Apparel Dispensers**

No. of Bins	Dimensions W" x D" x H"	Acrylic*		SD- PVC	
		Cat. #	S/Each	Cat. #	S/Each
4	48.5 x 24 x 36	<b>4951-06</b>	<b>3,564.00</b>	<b>4951-07</b>	<b>6,340.00</b>
3	36.5 x 24 x 36	<b>4951-08</b>	<b>2,770.00</b>	<b>4951-09</b>	<b>5,283.00</b>
2	24.5 x 24 x 36	<b>4951-10</b>	<b>2,123.00</b>	<b>4951-11</b>	<b>4,370.00</b>

\* Acrylic is damaged by alcohol and other solvents.

View all [Apparel Dispensers](#) online.

# CLEANROOM GARMENT STORAGE



Garment rack only



Garment rack with shelves



Adjustable shelves



HEPA-filtered models dislodge and remove particles



Powder-Coated Steel



304 SS with steel door frames



Top component fits filter/blower or can be used as storage

Terra's versatile cleanroom storage cabinets house a variety of garments, booties, supplies, tools and process equipment. Select models are available with HEPA filter/blower that removes 99.99% of all contaminants 0.3 microns and larger. The chrome-plate hardware, nonshedding materials ensure cleanroom compatibility. Models have double doors with self-closing hinges that require minimum clearance and provide easy access to stored items. Type A cabinets accommodate up to 30 garments.

Cabinet doors can be ordered in clear acrylic or SD-PVC. All models include a 6"H (152 mm) stand with leveling feet.

Models are also available in 220V. Acrylic is damaged by alcohol and other cleaning agents.

Cabinets can also be ordered in custom sizes. [View](#) online product page.

## Cleanroom Garment Storage Cabinets: Powder-Coated Steel

Specifications		Powder-Coated Steel				Powder-Coated Steel w/ Steel Door Frames				
Type	Dimensions W" x D" x H"	w/Acrylic Doors*		w/Dissp. PVC Doors		w/Acrylic Doors*		w/Dissp. PVC Doors		
		Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	
A	Filter/Blower	40 x 26.5 x 94	4101-03C	2,419.00	4101-17C	2,615.00	4101-03C-HD	1,964.00	4101-17C-HD	2,394.00
		52 x 26.5 x 94	4101-01C	2,661.00	4101-15C	3,003.00	4101-01C-HD	2,156.00	4101-15C-HD	2,773.00
	Cabinet Only	40 x 26.5 x 94	4101-02C	1,692.00	4101-16C	2,034.00	4101-02C-HD	2,524.00	4101-16C-HD	3,129.00
B	Filter/Blower	52 x 26.5 x 94	4101-00C	1,928.00	4101-14C	2,270.00	4101-00C-HD	2,812.00	4101-14C-HD	3,312.00
		40 x 26.5 x 94	4101-04C	2,563.00	4101-18C	2,905.00	4101-04C-HD	3,212.00	4101-18C-HD	3,713.00
	Cabinet Only	52 x 26.5 x 94	4101-06C	2,819.00	4101-20C	3,161.00	4101-06C-HD	2,962.00	4101-20C-HD	4,149.00
C	Filter/Blower	40 x 26.5 x 94	4101-05C	1,792.00	4101-19C	2,134.00	4101-05C-HD	3,361.00	4101-19C-HD	3,645.00
		52 x 26.5 x 94	4101-07C	2,043.00	4101-21C	2,385.00	4101-07C-HD	2,453.00	4101-21C-HD	2,987.00
	Cabinet Only	40 x 26.5 x 94	4205-20C	2,385.00	4205-21C	2,782.00	4205-20C-HD	3,110.00	4205-21C-HD	2,805.00
	52 x 26.5 x 94	4205-22C	2,685.00	4205-23C	3,026.00	4205-22C-HD	3,100.00	4205-23C-HD	3,446.00	
	40 x 26.5 x 94	4101-11C	1,706.00	4101-25C	2,048.00	4101-11C-HD	1,782.00	4101-25C-HD	2,262.00	
	52 x 26.5 x 94	4101-13C	1,945.00	4101-27C	2,537.00	4101-13C-HD	1,974.00	4101-27C-HD	2,368.00	

## Replacement HEPA Filter

For models with filter/blower unit. Rated 99.99% efficient @ 0.3µm particles

Cat. # S/Each  
1681-02 363.00

## Cleanroom Hangers

### Electropolished SS Closed Loop

Cat. # S/Each  
1530-30-2 14.00

### Detachable

Cat. # S/Each  
1530-31-2 14.00

[Shelves](#) available online



\* Acrylic is damaged by alcohol and strong cleaning agents

## Cleanroom Garment Storage Cabinets: 304 Stainless Steel


Specifications		304 Stainless Steel w/ shelves				304 Stainless Steel w/ SS Door Frames				
Type	Outside Dimensions W" x D" x H"	w/Acrylic Doors*		w/Dissp. PVC Doors		w/Acrylic Doors*		w/Dissp. PVC Doors		
		Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	
A	Filter/Blower	40 x 26.5 x 94	4101-57B	4,781.00	4101-68B	5,123.00	4101-57B-HD	5,301.00	4101-68B-HD	5,643.00
		52 x 26.5 x 94	4101-59B	5,311.00	4101-70B	5,903.00	4101-59B-HD	5,831.00	4101-70B-HD	6,173.00
	Cabinet Only	40 x 26.5 x 94	4101-58B	3,898.00	4101-69B	4,240.00	4101-58B-HD	4,418.00	4101-69B-HD	4,760.00
B	Filter/Blower	52 x 26.5 x 94	4101-60B	4,516.00	4101-71B	5,108.00	4101-60B-HD	4,266.00	4101-71B-HD	5,378.00
		40 x 26.5 x 94	4101-61B	4,925.00	4101-72B	5,267.00	4101-61B-HD	5,445.00	4101-72B-HD	6,037.00
	Cabinet Only	52 x 26.5 x 94	4101-63B	5,470.00	4101-74B	5,812.00	4101-63B-HD	5,990.00	4101-74B-HD	6,332.00
C	Filter/Blower	40 x 26.5 x 94	4101-62B	4,018.00	4101-73B	4,360.00	4101-62B-HD	4,538.00	4101-73B-HD	4,880.00
		52 x 26.5 x 94	4101-64B	4,653.00	4101-75B	4,995.00	4101-64B-HD	5,173.00	4101-75B-HD	5,515.00
	Cabinet Only	40 x 26.5 x 94	4205-65B	4,802.00	4205-76B	5,144.00	4205-65B-HD	5,322.00	4205-76B-HD	5,664.00
	52 x 26.5 x 94	4205-67B	5,334.00	4205-78B	5,334.00	4205-67B-HD	5,854.00	4205-78B-HD	6,196.00	
	40 x 26.5 x 94	4101-66B	3,915.00	4101-77B	4,257.00	4101-66B-HD	4,425.00	4101-77B-HD	4,777.00	
	52 x 26.5 x 94	4205-24C	4,536.00	4205-25C	4,878.00	4205-24C-HD	5,056.00	4205-25C-HD	5,398.00	



# GARMENT STORAGE RACKS

Made with ultra-clean electropolished 304 stainless steel, these sturdy and cleanroom-ready garment storage racks will not shed particles or snag garments. All models have an overall height of 74".

[View](#) online product page for a complete list of available sizes.

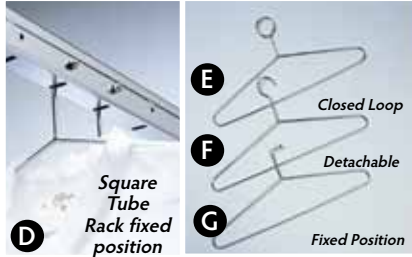

**Cylinder Frame Rack**  
For use with detachable hangers.  
(1½"-diameter tubes) Overall height: 76"

**Square-Tube Rack sliding position style for use with closed-loop or detachable hangers.**  
Overall height: 74"

Electropolished Cleanroom Hanger			
Type	For Rack Type	Cat. #	\$/Each
E. Closed Loop	C	1530-30-2	14.00
F. Detachable	A, B or C	1530-31-2	14.00
G. Fixed Position	A, B or D	1530-32-2	14.00

## Electropolished Stainless Steel Garment Storage Racks

Type See photos above	Dimensions	Hanger Capacity (order separately)		A/B. Cylinder Tube Frame (order hanger 1530-32-2 separately)				C/D. Square Tube Frame			
		Single Rack	Dual Rack	A. Single-Rack		B. Dual-Rack		Single-Rack		Dual-Rack	
				Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each
C. Sliding Position (order closed loop or detachable hangers)	48"W x 24"D	15	30	—	—	—	—	9230-00-2	910.00	9230-04-2	1,434.00
	60"W x 24"D	19	38	—	—	—	—	9230-01-2	1,146.00	9230-05-2	1,608.00
	72"W x 24"D	23	46	—	—	—	—	9230-02-2	989.00	9230-06-2	1,925.00
	84"W x 24"D	27	54	—	—	—	—	9230-03-2	1,347.00	9230-07-2	2,067.00
A, B, & D. Fixed Position (order fixed position hangers)	48"W x 24"D	15	30	9602-67	1,347.00	9602-75	2,505.00	9230-08-2	1,063.00	9230-12-2	1,948.00
	60"W x 24"D	19	38	9602-68	1,659.00	9602-76	2,929.00	9230-09-2	1,325.00	9230-13-2	2,294.00
	72"W x 24"D	23	46	9602-69	1,805.00	9602-77	3,349.00	9230-10-2	1,440.00	9230-14-2	2,526.00
	84"W x 24"D	27	54	9602-70	1,975.00	9602-78	3,550.00	9230-11-2	1,569.00	9230-15-2	2,793.00

# GOWNING ROOM FURNISHING

## A. Upright and Wall-Mount Garment Racks

Electropolished stainless steel

A. Wall-Mount and Upright by Metro					
Width	Hangers	Cat. #	\$/Each	Cat. #	\$/Each
36"	11	2650-16	1,097.00	2650-20	576.00
48"	15	2650-17	1,188.00	2650-21	753.00
60"	19	2650-18	1,616.00	2650-22	954.00
72"	23	2650-19	1,713.00	2650-23	1,036.00

## B. Garment Storage Rack

Chrome-plated wire racks

B. Garment Storage Rack by Metro			
Required Quantity	Item	Cat. #	\$/Each
4	62.563"H SS Corner Post	2650-30	38.00
5	24" x 48" SS Wire Shelf	1300-82	213.00
15	8"H SS Shelf Divider	1303-32	48.00
5	4"H SS Rear Ledge	1302-99	57.00
10	4"H SS Side Ledge	1302-95	32.00
2	5" Stem Caster	2080-55	36.00
2	5" Stem Caster with Brakes	2080-56	36.00



Bench shown:  
No. 2650-24

Click [here](#) for further details and images of wall-mount models.



**A** No. 2820-00A and No. 2800-00A



**B**



**C**

## Approval Listing and Regulation Key

- FM Factory Mutual tested and approved
- N Designed in accordance with National Fire Protection Association (NFPA) code 30 regulation
- O Complies with OSHA regulations
- U Complies with Uniform Fire Code

## A. Sure-Grip® EX Safety Can Storage Cabinets

Designed to meet OSHA and NFPA standards, these cabinets are sturdily constructed of all-welded, 18-gauge, double-walled steel with 1.5" of insulating air space for fire resistance. They include spill-slope safety shelves adjustable on 3" centers and dual vents with built-in arresters. All models shut and latch automatically when fusible links melt at 165°F (74°C) under fire conditions. Patented, concealed closing mechanism in self-close style maximizes available shelf space and minimizes risk of damage to the mechanism.

U-Loc™ padlockable paddle handle with slip resistant grip offers easy fingertip operation and reduces dangerous "catches" from passing traffic. Haz-Alert™ reflective labeling bursts with high visibility when illuminated by a flashlight beam, ensuring visibility of hazardous warning message. Sturdy galvanized steel SpillSlope™ shelves safely direct incidental spills to the back and bottom of the leak-proof sump. Includes leveling feet, grounding connector, and hazard warning in three languages. Backed by a 10-year warranty. [View](#) online product page.

Capacity (gal.)	Dimensions (W x D x H)	Approval Listing*	Doors/Type	Cat. #	\$/Each
30	43" x 18" x 44"	FM, N, O	2 / manual	<b>2800-00A</b>	<b>530.00</b>
30	43" x 18" x 44"	FM, N, O, U	2 / self-closing	<b>2820-00A</b>	<b>602.00</b>
45	43" x 18" x 65"	FM, N, O	2 / manual	<b>2820-02A</b>	<b>665.00</b>
45	43" x 18" x 65"	FM, N, O, U	2 / self-closing	<b>2820-03A</b>	<b>737.00</b>
60	34" x 34" x 65"	FM, N, O	2 / manual	<b>2820-05A</b>	<b>802.00</b>
60	34" x 34" x 65"	FM, N, O, U	2 / self-closing	<b>2820-06A</b>	<b>872.00</b>

\* See key below.

## B. Corrosive Storage Cabinets

These steel cabinets feature a two-part enamel coating which has been tested successfully with widely used acids, caustics, and alkalines, such as hydrochloric acid 37%, sulfuric acid 33%, and sodium hydroxide. This surface will not allow absorption that could cause subsequent problems. The 22-gallon model is an Under-the-Counter Cabinet, with polypropylene-lined bottom and top, and a .75-inch tray top, which can completely contain a 5-pint spill. The other three models, which are floor-mounted, feature corrosive-resistant polyethylene trays, to contain spills, on the bottom and on the shelves. [View](#) online product page.



For Disposal Bottles:  
TerraUniversal.com

Capacity (gal.)	Dimensions (W x D x H)	Approval Listing*	Doors/Type	Cat. #	\$/Each
30	43" x 18" x 44"	FM, N, O	2 / manual	<b>2820-09A</b>	<b>627.00</b>
45	43" x 18" x 65"	FM, N, O	2 / manual	<b>2820-10A</b>	<b>741.00</b>
45	43" x 18" x 65"	FM, N, O, U	2 / self-closing	<b>2820-11A</b>	<b>830.00</b>
22	35" x 22" x 35"	FM, N, O	2 / manual	<b>2820-12A</b>	<b>600.00</b>

\* See key below.

## C. Polyethylene Acid Storage Cabinets

These one-piece Polyethylene Acid Storage Cabinets provide the ideal storage solution for wet processing acids and other chemistries. [View](#) online product page.

**Countertop Cabinet** includes an easy-clean internal polyethylene spill tray to contain incidental leaks. A separate polyethylene tray slides out from under the cabinet and can be used as a handy work tray. The door can be hinged from either side for best countertop surface use. Capacity: (2) 4-liter bottles of acids or bases. 14.25"W x 16.25"D x 19.5"H.

Cat. # **2820-31**      \$/Each **311.00**

**Undercounter Cabinet** features two internal compartments, each with an adjustable poly shelf that helps organize and segregate incompatible liquids. Separate pull-out sumps underneath the cabinet capture incidental leaks. The cabinet top doubles as a handy workspace. Two vent holes are included on the backside. The cabinet secures to the wall for stability and accepts a padlock. Capacity: (30) 1-liter bottles or a variety of containers. 36"W x 22.5"D x 36"H.

Cat. # **2820-32**      \$/Each **733.00**



**A**



**B** Polypropylene



**B** Acrylic



**C** Polypropylene



Mini-hood provides the ideal equipment enclosure

**C** Acrylic



**D**



Clean, dry benchtop storage

**E**



**F**



**G**



Ideal for finger cots

**H**



**H**



**I**

Item	Dimensions W" x D" x H"	Acrylic		Static Dissipative PVC		Polypropylene	
		Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each
A. Sneeze Guard	7.125 x 1.75 x 7.75	1601-50	16.00	1601-51	26.00	—	—
Sneeze Guard	11 x 1.625 x 11	1600-25	19.00	1602-75	29.00	—	—
B. Dispensing Bin	5 x 8 x 11.65	4950-12	149.00	4950-13	235.00	4952-06	258.00
C. Mini-Hood	20 x 12 x 16	4950-89	433.00	4950-90	693.00	4952-00	691.00
D. Balance Shield	12.25 x 13 x 12	4950-55	183.00	4950-56	277.00	—	—
E. Micro-Desiccator Storage Cabinet	9 x 11 x 8.5	4950-06	444.00	4950-08	705.00	4952-01	673.00
F. Tissue Box Holder	5.5 x 5.75 x 3.125	4950-41	19.00	4950-42	28.00	—	—
F. Tissue Box Holder	5 x 5.125 x 4.125	4005-53	28.00	4005-54	34.00	—	—
F. Tissue Box Holder	5.5 x 15 x 4.25	4950-43	36.00	4950-44	48.00	—	—
G. Pigeon Hole Organizer	16 x 16 x 7.5	4005-22	140.00	—	—	—	—
H. Small Parts Organizer	15.75 x 8 x 13	4005-51	379.00	4005-50	565.00	4952-07	593.00
I. Clip Board, Electropolished SS	12 x 9.5	1350-01A-2	59.00	—	—	—	—

# STAINLESS STEEL GLOVE DISPENSERS



**A** Models for loose or packaged gloves



**B**



**C**

**F**

**G**

## Stainless Steel Glove Dispensers –Electropolished 304 (316 SS available) by Terra

	Description	Dimensions W" x D" x H"	Cat. #	S/Each
<b>A</b>	Glove Dispenser Wall-mount	8 x 8 x 24 (1 Compt.)	4951-37-2	485.00
	Glove Dispenser Wall-mount	16 x 8 x 24 (2 Compt.)	4951-38-2	930.00
	Glove Dispenser Wall-mount	24 x 8 x 24 (3 Compt.)	4951-32-2	1,172.00
	Glove Dispenser Wall-mount	34.5 x 8 x 24 (4 Compt.)	4951-33-2	1,489.00
<b>B</b>	Bagged Gloves Dispenser Wall-mount	24.5 x 7.5 x 24 (2 Compt.)	4951-43-2	956.00
	Bagged Gloves Dispenser Wall-mount	34.5 x 7.25 x 24 (3 Compt.)	4951-44-2	1,187.00
	Bagged Gloves Dispenser Wall-mount	27 x 7 x 24 (3 Compt.)	4951-30-2	1,129.00
	Bagged Gloves Dispenser Wall-mount	34.5 x 8 x 24 (4 Compt.)	4951-31-2	1,489.00
	Bagged Gloves Dispenser Wall-mount	27 x 8.25 x 24 (4 Compt.)	4951-46-2	1,426.00
<b>C</b>	Glove Dispenser with Waste Bin	24 x 18.5 x 59 (3 Compt.)	4951-34-2	2,442.00
	Glove Dispenser with Waste Bin	31.5 x 18.5 x 63 (4 Compt.)	4951-39-2	2,962.00
<b>D</b>	Glove Dispenser (not shown)	12 x 6 x 6	4951-50-2	131.00
<b>E</b>	Glove Dispenser (not shown)	5.75 x 3.875 x 11 (1 box)	4951-53-2	60.00
<b>F</b>	Glove Dispenser	12 x 3.75 x 11 (2 boxes)	4951-54-2	66.00
<b>G</b>	Glove Dispenser	18 x 3.75 x 11	4951-55-2	84.00
<b>H</b>	Glove Dispenser (not shown)	5.75 x 3.875 x 22 (2 boxes)	4951-51-2	67.00
<b>I</b>	Glove Dispenser (not shown)	5.75 x 3.875 x 33 (3 boxes)	4951-52-2	74.00



Benchtop option for item A, No. 4951-90-2

# PLASTIC GLOVE DISPENSERS

[View](#) all Glove and Parts Dispensers online.



**A**

Polypropylene



**B**



**C**



**D**

Polypropylene

## Acrylic, Static Dissipative PVC and Polypropylene Glove Dispensers by Terra

	Glove Dispenser	Dimensions W" x D" x H"	Acrylic		Static Dissipative PVC		Polypropylene	
			Cat. #	S/Each	Cat. #	S/Each	Cat. #	S/Each
<b>A</b>	Wall Mount (3 Chamber)	16 x 11.5 x 12	4005-56	286.00	4005-57	432.00	4952-03	471.00
<b>B</b>	Wall Mount	16.5 x 12.5 x 17	4950-72	257.00	4950-74	347.00	4952-02	382.00
<b>C</b>	Plastic Boxed Gloves Holder	5.125 x 11.5 x 4.88	4950-85	56.00	4950-86	93.00	—	—
<b>D</b>	Benchtop	12 x 6 x 6	4951-03	89.00	4951-04	134.00	4952-04	133.00

# CLEANROOM SAFETY GLASS HOLDERS



98 Capacity  
#4951-05



#4951-57 Wall-Mount Safety Glasses Dispenser



Open bottom for easy cleaning!



#4952-10 Polypropylene

## Safety Glasses Holders by Terra

Capacity	Dimensions W" x D" x H"	Acrylic		Static Dissipative PVC		Polypropylene	
		Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each
8	6.75 x 5.75 x 17	4950-45	282.00	4950-46	354.00	4952-10	372.00
12	9.75 x 5.75 x 17	4951-15	369.00	4951-16	438.00	—	—
16	6.69 x 5.45 x 26.42	4951-17	461.00	4951-18	607.00	—	—
16	13.25 x 5.5 x 17	4951-19	461.00	4951-20	607.00	—	—
24	9.75 x 5.75 x 28.25	4951-21	599.00	4951-22	788.00	—	—
24	19.5 x 5.75 x 17	4951-23	599.00	4951-24	978.00	—	—
32	13.25 x 5.5 x 29.25	4951-25	912.00	4951-26	1,092.00	—	—
48	19.5 x 5.75 x 28.25	4951-27	1,078.00	4951-28	1,510.00	—	—
98	23.75 x 5.70 x 46	4951-05	1,551.00	—	—	—	—

## Wall-Mount Safety Glass Dispensers by Terra

	Dimensions W" x D" x H"	Cat. #	\$/Each
Electropolished 304 Stainless Steel	14.5 x 10 x 22	4951-57	455.00
Polypropylene	14.5 x 10 x 22	4951-58	336.00

[View](#) all Safety Glass Holders online.

# CLEANROOM DISPENSERS



Click [here](#) to view Cleanroom Equipment and Supplies online.

## Bootie, Hat, Wiper and Swab Dispensers by Terra

Dispenser Type	Dimensions W" x D" x H"	Acrylic		Static Dissipative PVC		Polypropylene		304 Stainless Steel	
		Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each	Cat. #	\$/Each
A Bootie	15 x 6 x 6	4950-97	71.00	4950-98	112.00	4952-12	71.00	4951-45-2	166.00
B Hat	12 W x 6 x 6	4950-99	86.00	4951-00	148.00	—	—	—	—
C Wiper, Small	10.5 x 14.5 x 4	4950-93	69.00	4950-94	128.00	4952-09	69.00	—	—
Wiper, Large	12.5 x 15 x 3.75	4950-95	81.00	4005-55	149.00	4952-11	81.00	—	—
D Enclosed Wiper	12 x 9 x 6	4951-01	97.00	4951-02	172.00	4952-08	191.00	—	—
E Wiper, Large	12.5 x 9.5 x 6	—	—	—	—	—	—	4951-40-2	134.00
Wiper, Small	9.5 x 9.5 x 6	—	—	—	—	—	—	4951-41-2	148.00
F Swab	6 x 4 x 6	4950-87	43.00	4950-88	74.00	—	—	4951-35-2	85.00



**myBath™ Digital Water Bath  
by Benchmark Scientific**

These compact models are made with high-efficiency insulation, and they maintain temperature stability and uniformity for heating reagents and samples. [View](#) online product page.

- Temperature Range: Ambient +5 to 100°C
- 4 L model includes racks for 1.5/2.0, 15 & 50 ml tubes
- 8 L and 12 L models include drains
- 4 L, 8 L, and 12 L units have removable gable
- Digital controls to select and monitor water temperature
- 3-digit display shows temperature increments
- Quik-CAL™ temperature calibration function (2 L models use traditional calibration)
- Seamless, rust-resistant stainless-steel chamber with rounded corners for easy cleaning

**myBath Digital Water Bath Series, 115V**

Liter	Interior Dimensions W" x D" x H"	Cat. #	S/Each
2 L	5.5 x 6 x 4	<b>BR17-02</b>	<b>458.00</b>
4 L	5.3 x 9.4 x 5.5	<b>BR17-00</b>	<b>723.00</b>
8 L	12.8 x 10.4 x 5.9	<b>BR17-03</b>	<b>705.00</b>
12 L	12.8 x 10.4 x 7.9	<b>BR17-04</b>	<b>836.00</b>



**Refrigerated/Heating Circulator  
by JULABO**

**Working temperature: -20°C to 100°C**

Models are used for external instrument integration and for temperature applications directly in the bath. [View](#) online product page for additional models.

- Circulating pump provides short heat-up and cool-down times
- LED temperature display, resolution 0.1°C
- Keypad switches automatically to the actual value; PID1 temperature control
- Adjustable high temperature cut-out / dry-running protection
- Includes 2 barbed fittings and removable venting grill

Temperature Range	Cat. #	S/Each
-20 to 100°C	<b>2540-00</b>	<b>2,928.00</b>



**Cryo-Compact Circulators BY JULABO**

**Working temperature: -40°C to +200°C**

Compact models are designed to be stored side-by-side with other units or directly under a fume hood. [View](#) online product page for additional models

- Dimensions: 9.5"W x 18.1"D x 15.8"H
- Ventilation air cooling
- Maximum ambient temperature of +40°C
- Heating capacity of 2 kW
- Filling volume: 3.5 L
- Wetted parts made of stainless steel or plastic

Temperature Range	Cat. #	S/Each
-30 to 150°C	<b>2540-04</b>	<b>5,022.00</b>



**Recirculating Coolers by JULABO**

**Working temperature: -25°C to +130°C**

Cost-efficient, energy-saving models are suited for any cooling requirement in labs or industrial environments. [View](#) online product page for additional models.

- Cooling capacity up to 20 kW!
- Splash-proof keypad; LED display
- Alarm output and RS232 (select models)
- Filling-level indicator and pressure indicator
- Circulating pumps; Optional air or water cooling
- Easy fill and drain tap readily accessible
- All wetted parts made of stainless steel or high grade plastic(except FC-T models)

Temperature Range	Cat. #	S/Each
-20 to 40°C	<b>2540-13</b>	<b>5,201.00</b>

**A. Barnstead™ MicroPure™ System**

The compact units are ideal for producing ultrapure water for molecular biology, microbiology and analytical chemistry labs. They produce 15 liters/day of Type 1 water and are available with mix-and-match system option for UV, UF, UV/UF treatment. [View](#) online product page for more configurations and specifications.

	Cat. #	\$/Each
Analytical and UV System	<b>3614-91</b>	<b>3,375.00</b>
UV-ST System	<b>3614-96</b>	<b>3,531.00</b>

(Includes integrated 6 L feed water tank)

**B. Barnstead EASYpure™ RoDi System**

The RoDi system produces 800ml/minute of Type I water from tap feed on demand. These portable systems provide a reservoir feed for reagent-grade water. Integrated pump is whisper-quiet. [View](#) online product page.

	Cat. #	\$/Each
EASYpure RoDi	<b>3613-30</b>	<b>3,290.00</b>
(Requires Start-Up Kit below)		
Start-Up Kit	<b>3613-31</b>	<b>399.00</b>

**C. Barnstead GenPure™ Water Purification System**

Able to mix and match UF, UV and TOC systems for user-specific water purity levels, the GenPure system produces up to 200 L/day of GLP-compliant Type 1 ultrapure water from a pretreated feed water supply. It is ideal for a broad range of life sciences and analytical chemistry processes. [View](#) online product page for more configurations and specifications.

	Cat. #	\$/Each
GenPure Water System	<b>1714-32</b>	<b>5,049.00</b>
GenPure UF Water System	<b>1714-33</b>	<b>5,507.00</b>

(Includes Ultra-Filtration; ideal for molecular biology, microbiology, PCR, IVR and monoclonal antibody processes)

**D. GenPure xCAD Water Purification System**

Includes all the features of the GenPure system above, plus remote dispensing, electronic dosing capabilities, and flexible mounting options. [View](#) online product page.

	Cat. #	\$/Each
GenPure xCAD Water System	<b>1714-48</b>	<b>5,360.00</b>
GenPure xCAD UF Water System	<b>1714-49</b>	<b>5,818.00</b>

(Includes Ultra-Filtration; ideal for molecular biology, microbiology, PCR, IVR and monoclonal antibody processes)

**E. LabTower™ TII Water Purification System**

This system converts tap water into GLP-compliant Type 2 water; choose 20 L or 20 L/hr. models. This stand-alone unit with casters has an integrated 100 L tank that recirculates reservoir water to preserve purity even during periods of stagnation. Optional UV light eliminates bacteria. More configurations and specifications. [View](#) online product page.

	Cat. #	\$/Each
LabTower TII System, 20 L/hr.	<b>1108-50</b>	<b>8,327.00</b>
LabTower TII System, 40 L/hr.	<b>1108-52</b>	<b>9,076.00</b>

**F. LabTower EDI Water Purification System**

Two stand-alone systems in one. These models produce either Type 1 (up to 200L/day) or Type 2 (up to 500L/day) purified water. Includes high-performance RO module with Electrodeionization (EDI) technology. Integrated 100-liter tank recirculates Type 2 water to optimize purity. [View](#) online product page.

	Cat. #	\$/Each
LabTower EDI System, 15 L/hr.	<b>1714-60</b>	<b>11,546.00</b>
LabTower EDI System, 30 L/hr.	<b>1714-61</b>	<b>13,210.00</b>





### Thousands of Products in Stock

Laboratory-Equipment.com and TerraUniversal.com offer popular medical and pharmacy equipment from trusted manufacturers such as Thermo Scientific, Labconco, Germfree, Terra Universal, InterMetro, Rubbermaid and many more.

**Prices in BLUE** represent in-stock items and products available for quick shipping.

**Need it Soon?** Built-to-order products are available for Fast Track 24/7. Contact Terra Universal at 714-578-6100.

**Product Selector** makes it easy for you find the exact product you need.

**System Builder** easily lets you configure your system with options and accessories



### Online Selection and Configuration Tools



### Order Online

**Easy online ordering** on thousands of ready-made products and pre-configured systems.

**Online quote requests** for made-to-order and custom products.



### Low-Cost Domestic and International Shipping

Competitive quotes include customs brokerage and duties for door-to-door delivery



### Hassle-Free Pricing

Web prices honored worldwide



### Diverse, Compliant and Cost-Effective



**Laboratory-Equipment.com** offers a diverse range of laboratory products at competitive prices. Select products meet USP-797, ISO Class 5 – 8, CE, CA/CAN, TUV and many other compliance standards.

Visit [www.Laboratory-Equipment.com](http://www.Laboratory-Equipment.com) to view thousands of products from trusted manufacturers.



### Global Network of Sales Representatives

Complete listing at TerraUniversal.com



### Free-Shipping

On all products at Laboratory-Equipment.com shipped to the continental U.S.



All prices and specifications are subject to change without notice. Crating charges apply to selected items. Call for information.